



## WIRELESS G ADSL2+ ROUTER

### HIGH-SPEED INTERNET

Latest ADSL2+ standards provide Internet transmission of up to 24Mbps downstream, 1Mbps upstream

### ALL-IN-ONE SINGLE BOX SOLUTION

Built-in ADSL interface, 54Mbps Wireless LAN, QoS and Firewall protection, all in one single desktop box

### TOTAL COMPATIBILITY

Works with all major Internet Service Providers, supports UPnP, easy to install by home and office users



### ULTIMATE INTERNET CONNECTION

The DSL-2600U Wireless G ADSL2+ Router is an affordable high-performance ADSL router for home and the small office. With integrated ADSL2+ supporting up to 24Mbps download speed, 802.11g wireless LAN, firewall protection, Quality of Service (QoS) and Ethernet switch port, this router provides all the essentials that a home or small office needs to establish a secure and high-speed remote link to the outside world.

### AFFORDABLE HIGH-SPEED CONNECTION FOR HOME & SMALL OFFICE

Designed as a very affordable high-performance ADSL router for home and SOHO users, the device provides not only the cost-effective, high-speed Internet connection, but also the security and Quality of Service (QoS) required by users in today's high-risk and versatile Internet environments.

### READY WIRED & WIRELESS LAN CONNECTION

The DSL-2600U Wireless G ADSL2+ Router provides an integrated 802.11g WLAN interface supporting wireless speeds of up to 54Mbps and interoperability with 802.11b wireless devices on the 2.4GHz frequency band. It also includes a 10/100Mbps Ethernet switch port for ready workstation connection. These built-in functions save you the cost and trouble of installing a separate wireless access point and an Ethernet switch.

### FIREWALL PROTECTION



Security features prevent unauthorized access to the home and office network from Internet intruders. The router provides firewall security using Stateful Packet Inspection (SPI) and Denial of Service (DoS) attack protection. SPI inspects the contents of all incoming packet headers before deciding what packets are allowed to pass through. Router access control is provided with packet filtering based on port and source/destination MAC/IP addresses.

### WHAT THIS PRODUCT DOES

This wireless ADSL router connects to the Internet using an integrated high-speed ADSL2+ interface. You share the high-speed Internet connection with a computer at your home or office. The router provides firewall protection and QoS for secure and smooth on-line games, voice communication and download of photos, files, music and video over the Internet. Built-in 802.11g wireless LAN provides ready connection for wireless users, while an Ethernet port provides a connection to a computer through an Ethernet cable.

### GET HIGH-SPEED ADSL SPEED

Ready ADSL connection with up to 24Mbps downstream and 1Mbps upstream. Watch TV, listen to live music and broadcast on the Internet, play games and experience clear Internet phone calls. Now, smooth streaming multimedia and VoIP voice are possible at home and in the office through a simple connection to this router.

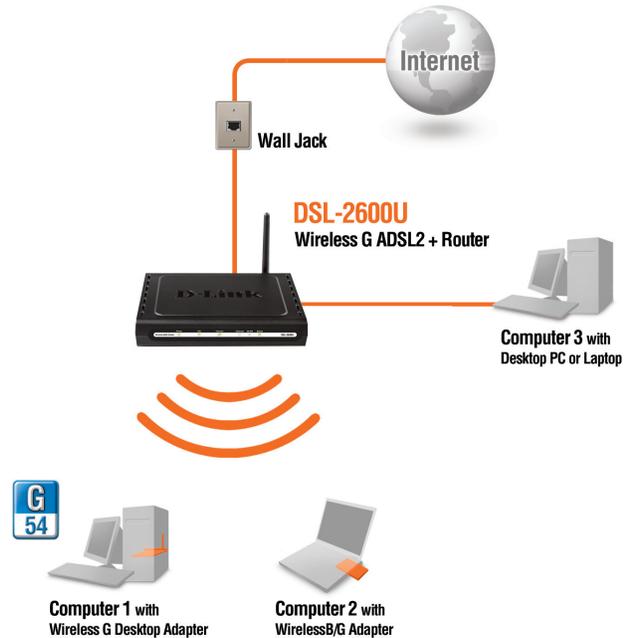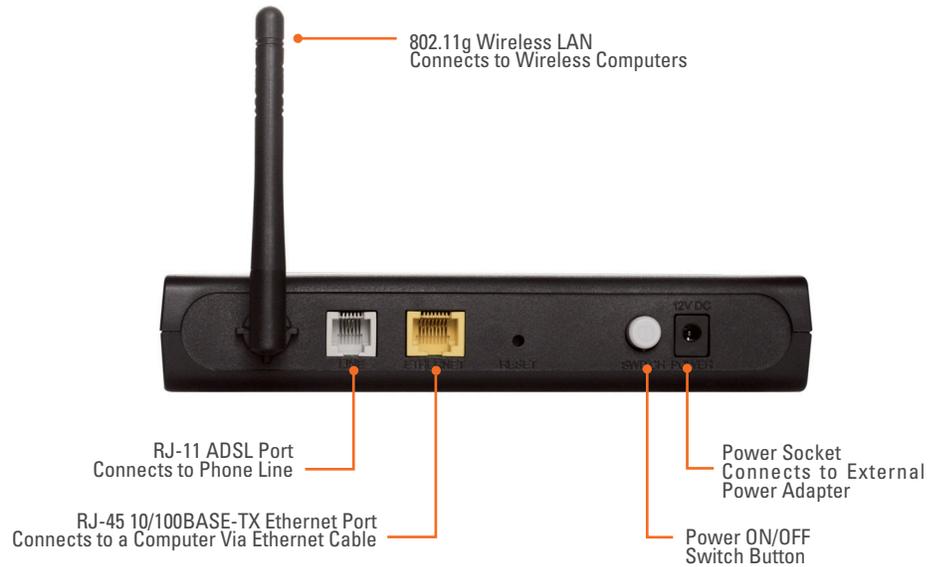

### TECHNICAL SPECIFICATIONS

#### DEVICE INTERFACES

- 1 RJ-11 ADSL port
- 1 RJ-45 10/100BASE-TX Fast Ethernet LAN switch port with auto MDI/MDIX
- Built-in 802.11g WLAN

#### WIRELESS LAN

- IEEE 802.11g standard
- Frequency range: 2.4 GHz to 2.497 GHz
- Wireless speed: up to 54Mbps
- 64/128-bit WEP data encryption
- MAC-based ACL
- WPA/WPA2 security with TKIP, AES support

#### ADSL STANDARDS

- ADSL: Full-rate ANSI T1.413 Issue 2, ITU-T G.992.1 (G.dmt) Annex A, ITU-T G.992.2 (G.lite) Annex A, ITU-T G.994.1 (G.hs)
- ADSL2: ITU-T G.992.3 (G.dmt.bis) Annex A/L/M, ITU-T G.992.4 (G.lite.bis) Annex A
- ADSL2+: ITU-T G.992.5 Annex A/L/M

#### ADSL DATA RATES

- G.dmt: 8Mbps downstream, 832Kbps upstream
- G.lite: 1.5Mbps downstream, 512Kbps upstream
- ADSL2: 12Mbps downstream, 1Mbps upstream
- ADSL2+: 24Mbps downstream, 1Mbps upstream

#### ATM & PPP PROTOCOLS

- Multiple protocol encapsulation over AAL5
- Bridged and routed Ethernet encapsulation
- Logical Link Control (LLC) encapsulation
- VC-based multiplexing
- ATM Forum UNI3.1/4.0 PVC
- ATM Adaptation Layer Type 5 (AAL5)
- ITU-T I.610 OAM F4/F5 loopback
- ATM QoS (Traffic Shaping)
- PPP over ATM
- PPP over Ethernet

#### NETWORK PROTOCOLS AND FEATURES

- IP Static Routing
- RIP
- NAT
- Virtual Server, Port Forwarding
- DHCP server/client/relay
- DNS Relay, DDNS
- IGMP proxy
- SNTP

#### FIREWALL/ACCESS SECURITY

- NAT firewall
- MAC Filtering
- Packet Filtering (IP/ICMP/TCP/UDP)
- Stateful Packet Inspection (SPI)
- Denial of Service (DoS) prevention
- Intrusion Detection System and logging
- DMZ

#### VPN

- Multiple IPSec/PPTP/L2TP pass-through

#### QoS

- Traffic Prioritization/Classification based on:
  - Port
  - 802.1p Priority Queues
  - Application port
  - User-defined (TCP/UDP/ICMP etc.)
- 3 priority queues per PVC
- PVC/VLAN port mapping
- IGMP v.2 snooping

#### CONFIGURATION/MANAGEMENT

- Quick Installation Wizard
- Web-based GUI
- Web-based/TFTP firmware upgrade, configuration up/download
- UPnP
- SNMP v1, v2c, built-in MIB-I, MIB-II agent
- TR-069 compliant (optional)
- Factory reset button

#### DIAGNOSTIC LEDS

- Power
- Status
- DSL
- WLAN
- LAN 1
- Internet

#### POWER

- Power input: through 12VDC/0.7A, 100-240V 50/60Hz external AC power adapter
- Power ON/OFF switch
- Dying Gasp support

#### OPERATING TEMPERATURE

- 0° to 40° C (32° to 104° F)

#### STORAGE TEMPERATURE

- -20° to 65° C (-4° to 149° F)

#### OPERATING HUMIDITY

- 5% to 95% non-condensing

#### CERTIFICATIONS

- FCC
- CE



D-Link Corporation  
No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan  
Specifications are subject to change without notice.  
D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.  
All other trademarks belong to their respective owners.  
©2010 D-Link Corporation. All rights reserved.  
Release 01 (February 2010)