

Control Two Computers with One Console

DKVM-2U



- Control Two Computers with One Monitor, USB Keyboard, and USB Mouse
- Instantly Switch Between Computers Using "Select" Button or Keyboard Hot Keys
- Built-in 6' KVM Cables with Convenient USB Connectivity
- Support up to 2048 x 1536 Monitor Resolution
- Plug & Play-No Software Required



Home & Office KVM Solutions

2-Port USB

KVM Switch

The D-Link DKVM-2U is a 2-port USB-based KVM switch for controlling two computers using a single monitor, USB keyboard, and USB mouse. The DKVM-2U minimizes clutter on your desktop with its compact design and built-in cables.

The widespread adoption of USB connectivity makes the DKVM-2U a great addition to your home or office. Each set of built-in cables on the DKVM-2U easily connects to a computer's VGA port and any available USB port, providing you with effortless installation. You get added flexibility with the DKVM-2U's hot-plug capability: add or disconnect computers simply by plugging or unplugging the cables without having to power down your computers!

The DKVM-2U is simple to use with features such as: at-a-glance LED indicators for computer status, keyboard hot keys and "Select" button for switching between computers, and an autoscan mode for automatically detecting computers connected to the switch.

The DKVM-2U is compatible with virtually all Windows[®] operating systems, and requires no software, extra power supplies, or accessories.

Versatile and convenient, the D-Link DKVM-2U can be easily integrated into your existing desktop environment at home or in the office, or anywhere you need to manage more than one computer.

Home & Office KVM Solutions

2-Port USB

KVM Switch

DKVM-2U



TECHNICAL SPECIFICATIONS

Computers

2

LEDs

2 Port Status LEDs

Console Connectors

- Keyboard:
USB
- Mouse:
USB
- Monitor:
15-pin HDDB Female VGA, SVGA,
XGA, MultiSync

Monitor Resolution Support:

Up to 2048 X 1536

Built-in KVM Cable Length

6Ft.

Switching Control

- Hot Keys
- "Select" Push Button

Switching Notification

Audio Beep

Scanning Interval

10 seconds

Power

Bus Powered - No External
Power adapter required

Dimensions

- Length 4.1 in (104mm)
- Width 2.4 in (62 mm)
- Height 1.1 in (28 mm)

Weight

1.24lbs (0.56kg)

Storage Temp

-4°F to 140°F (-20°C to 60°C)

Operating Temp

32°F to 122°F(0°C to 40°C)

Operating Humidity

0% to 80% Non-Condensing

Storage Humidity

0% to 80% Non-Condensing

Certifications


FCC, CE

Minimum Requirements

- Two Desktop Computers with
USB Ports
- One VGA, SVGA, or Multisync Monitor
- One USB Keyboard
- One USB Mouse

Warranty

1 Year

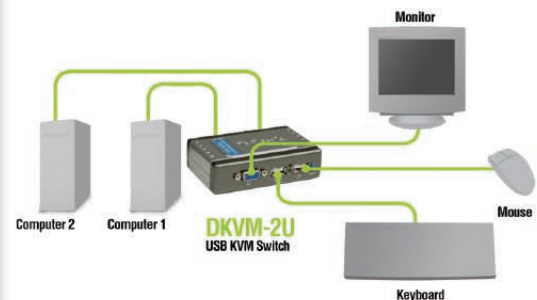

**Instantly Switch Between Two
Computers!**



D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
© Copyright D-Link Systems, Inc. 2002. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.
Other trademarks or registered trademarks are the property of their respective manufacturers or owners.
Price and specifications are subject to changes without notice. See inside package for warranty details.
*24/7 Tech Support is available only in USA.

D-Link®
Building Networks for People