



DCS-1000 Internet Camera and DCS-1000W Internet Camera with 11Mbps Wireless LAN. »»

## Internet Camera

The DCS-1000 series Internet Camera is a standalone system connecting directly to an Ethernet or Fast Ethernet network. This camera also supports wireless transmission based on the IEEE 802.11b standard.

### All-in-one System

This Internet Camera is different from conventional PC cameras in that it is an all-in-one system with built-in CPU and web-based solutions. The camera provides a low cost solution for transmission of high quality video images for monitoring. It can be managed remotely, accessed and controlled from any desktop or notebook PC over the Intranet or Internet via a web browser.

### Image Monitoring From Multiple Users

Up to 64 users can log onto the camera at the same time to monitor images. The camera utilizes the JPEG image compression technology, providing high quality images for users. JPEG is adopted since it is a standard for image compression and can be applied to various web browser and application software without the need to install extra software.

### Flexible Wireless Transmission Range

Model DCS-1000W camera comes with a wireless LAN interface. The antenna of this wireless camera can be changed for a variety of reasons such as extending the wireless transmission range. Generally the wireless distance can go up to 100 meters indoors and up to 300 meters outdoors. The range are limited by the number of walls, ceilings, or other objects that the wireless

signals must pass through. Typical ranges vary depends on the types of materials and background Radio Frequency (RF) noise in your home or business and the configuration setting of your network environment.

### Image Capture and Recording

You can capture images both as snapshots of single images or video images from the IPView application supplied with the CD-ROM of the camera.

### Indoor Installation

The Internet camera is designed for use indoors. It is not weatherproof, and needs to be equipped with a weatherproof case to be used outdoors.

### Connection to Ethernet-based Server

The camera provides a 10/100Mbps port, allowing connection to a Fast Ethernet server. The camera can be connected to a LAN with private IP addresses.

### Firewall Installation

If a firewall exists on the network, port 80 is open for ordinary data communication. However, since the camera transmits image data, the default port 8481 is also required. It is necessary to open port 8481 of the network for remote users to access the camera.

### Features

- Stand-alone Internet camera with CPU & RAM, no need to attach to PC
- Supports ActiveX control for Internet Explorer, Java applets, Netscape Navigator
- Remote access from web browser for live image viewing
- Operates in Windows, MacOS environments
- Connection to external devices for alarm-based events when trigger is activated
- Implemented for intruder detection with still image capture & e-mail notice
- Powerful IPView software for image capture & video recording

# DCS-1000/1000W

## Technical Specifications

### Video Specifications

#### Resolution

640 x 480 pixel

#### Sensor

1/3" color CMOS sensor

#### Gain control

Automatic

#### Exposure

Automatic

#### White Balance

Automatic

#### Shutter

Electronics 1/60 ~ 1/15000 secretary

#### Minimum Illumination

2.5lux@f1.4, 3000K Color

#### Focal Length

6.0 mm

#### Aperture

F=1.8

#### Focus Extent

20 cm - ∞

#### Lens mounting

Fixed board lens, CS-mount type

### Image (Video Setting)

#### Image compression

JPEG

#### Frame rate

30fps@QCIF, 20fps@CIF, 3fps@VGA

#### Compression Rate selection

5 level (Very Low, Low, Medium, High, Very High)

#### Frame rate setting

1, 5, 7, 15, 20, auto (depends on the video format)

#### Video resolution

160x120, 320x240, 640x480

#### Brightness control

Range 1- 128

#### Contrast control

Range 1- 128

#### Hue control

Range 1- 128

### System Hardware

#### LAN Connector

One RJ-45 port to connect to 10/100Mbps Ethernet, auto-sensed, wireless

#### Wireless LAN (DCS-1000W only)

Built-in 802.11b wireless LAN module  
(Wi-Fi compliant)

#### Wireless LAN Modulation Techniques (DCS-1000W only)

Direct Sequence Spread Spectrum (DSSS)

#### Wireless LAN Frequency Range (DCS-1000W only)

2.4 - 2.497GHz

#### Transmitter Output Power (DCS-1000W only)

12dBm

#### Generic I/O Port

4 I/O ports, 2 for input, and 2 for output

#### LED Indicator

- Power LED (Blue)  
- LAN/WLAN Activity LED (Orange)

#### Slide Switch

LAN/LAN&WLAN/WLAN

#### Antenna Connectors

2 connectors (DCS-1000W only)

## Internet Camera

### Communication Support

#### Wireless LAN Encryption

64 bit, 128 bit or OFF

#### Communication Protocols

HTTP, FTP, TCP/IP, UDP, ARP, ICMP, BOOTP, RARP, DHCP, PPPoE

### System Requirements

#### Browser Support

- Internet Explorer 5.0 or above (ActiveX & JAVA Mode - View Image for windows OS and JAVA Mode-View Image for other OS)
- CPU: Pentium II, 266 MHz or above
- Memory Size: 32 MB (64 MB recommended)
- VGA card resolution: 800x600 or above
- Netscape 6.0 or above (JAVA Mode - View Image)

#### IPView Application

- Win 98, Win 98 SE, Win 2000, Win Me, Win XP
- Pentium III, 450 MHz or above
- Memory Size of 128 MB (256 MB Recommended)
- VGA card resolution of 800x600 or above

### Physical & Environmental

#### Power Supply

DC 5V/2.4A, switching type

#### Power Communication

6.5 Watt (1300mA x 5V)

#### Weight

280 gram

#### Operating temperature

5°C ~ 50°C

#### Storage temperature

-25°C ~ 50°C

#### Humidity

5% ~ 95% non-condensing

#### EMI Certification

- DCS-1000W: FCC Class A, CE Class A
- DCS-1000: FCC Class B, CE Class B

### Ordering Information

#### Internet Camera

**DCS-1000** With 10/100Mbps Fast Ethernet Port

**DCS-1000W** With 10/100Mbps Fast Ethernet Port + IEEE 802.11b Wireless LAN

# D-Link®


Specifications subject to change without prior notice.  
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

<b>U.S.A</b>	TEL: 1-949-788-0805	FAX: 1-949-753-7033
<b>Canada</b>	TEL: 1-905-8295033	FAX: 1-905-8295095
<b>Europe</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511
<b>Germany</b>	TEL: 49-6196-77990	FAX: 49-6196-7799300
<b>France</b>	TEL: 33-1-30238688	FAX: 33-1-30238689
<b>Benelux</b>	TEL: 31-10-282-1445	FAX: 31-10-282-1331
<b>Italy</b>	TEL: 39-2-2900-0676	FAX: 39-2-2900-1723
<b>Iberia</b>	TEL: 34-93-4090770	FAX: 34-93-4910795
<b>Sweden</b>	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901
<b>Norway</b>	TEL: 47-22-309075	FAX: 47-22-309085
<b>Denmark</b>	TEL: 45-43-969040	FAX: 45-43-424347
<b>Finland</b>	TEL: 358-9-2707-5080	FAX: 358-9-2707-5081
<b>Singapore</b>	TEL: 65-6774-6233	FAX: 65-6774-6322
<b>Australia</b>	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
<b>Japan</b>	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868
<b>China</b>	TEL: 86-10-8518-2533	FAX: 86-10-8518-2250
<b>India</b>	TEL: 91-22-652-6696	FAX: 91-22-652-8914
<b>Middle East</b>	TEL: 9714-8834234	FAX: 9714-8834394
<b>Turkey</b>	TEL: 90-212-335-2553	FAX: 90-212-335-2500
<b>Chile</b>	TEL: 56-2-232-3185	FAX: 56-2-232-0923
<b>Brasil</b>	TEL: 55-11-3094-2910	FAX: 55-11-3094-2921
<b>South Africa</b>	TEL: 27(0)1266-52165	FAX: 27(0)1266-52186
<b>Russia</b>	TEL: 7-095-737-3389	FAX: 7-095-737-3390
<b>Taiwan</b>	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515
<b>D-Link Corp.</b>	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299




RECYCLABLE  
Rev. 03 (Nov. 2003)


#### SOHO

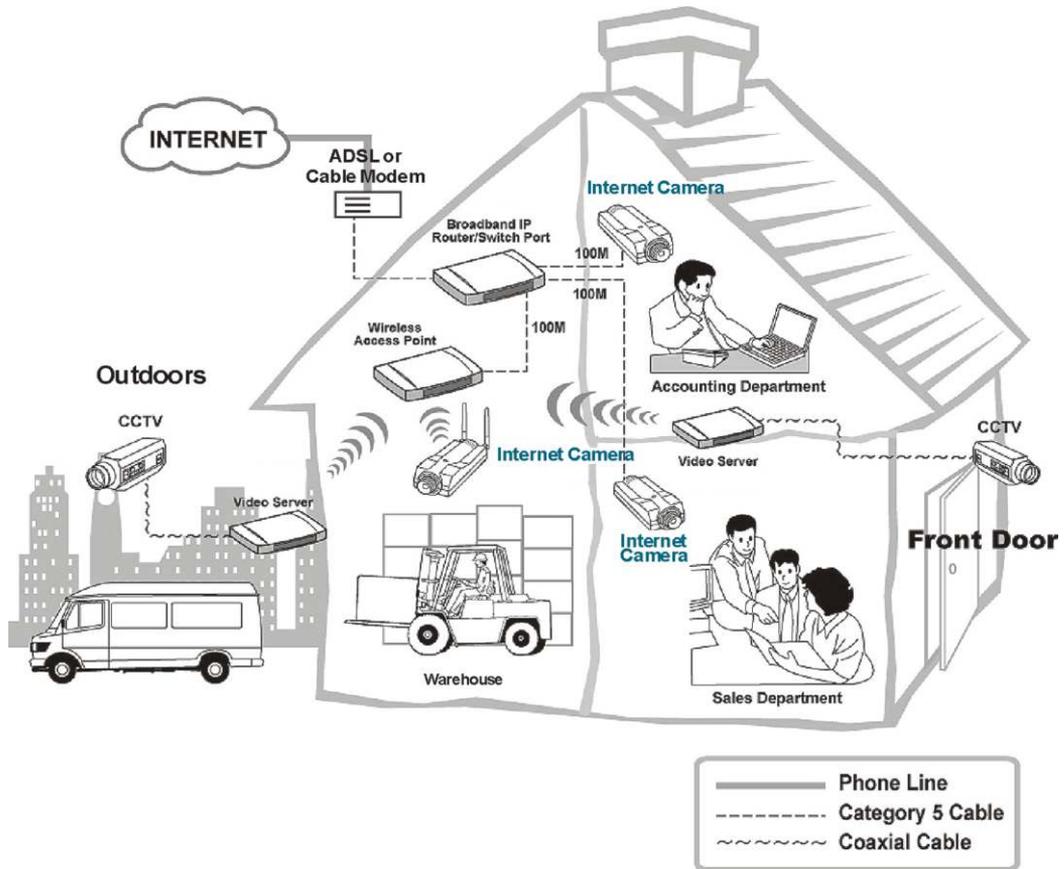

#### HOME

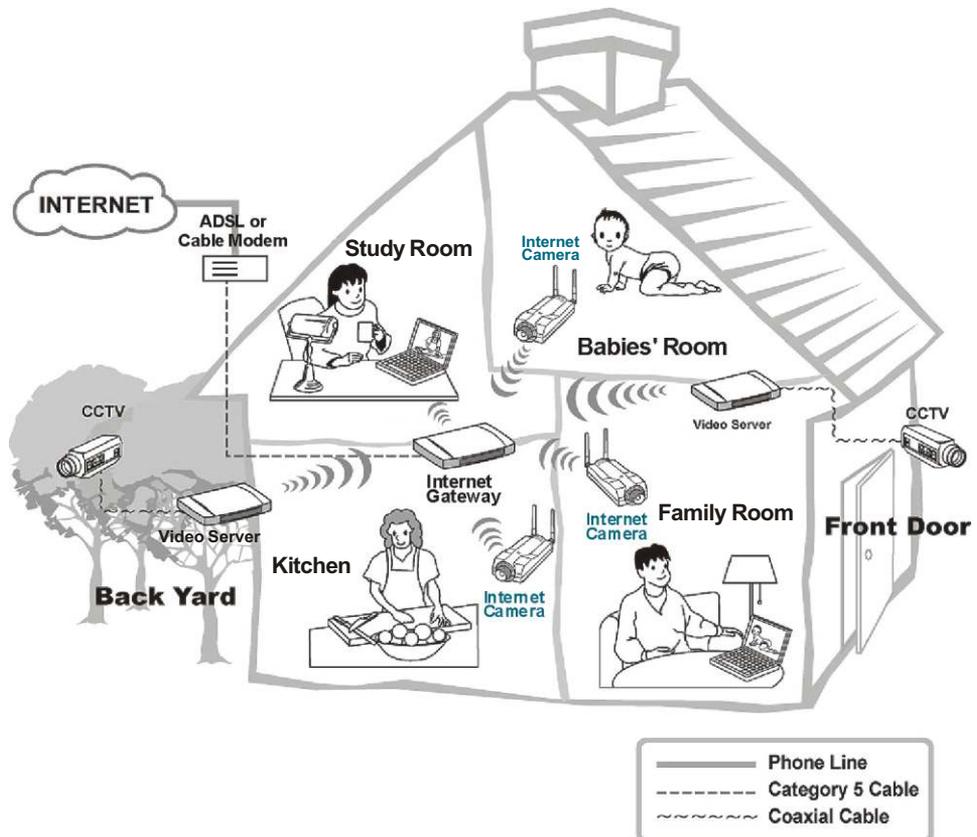

### ENTERPRISE

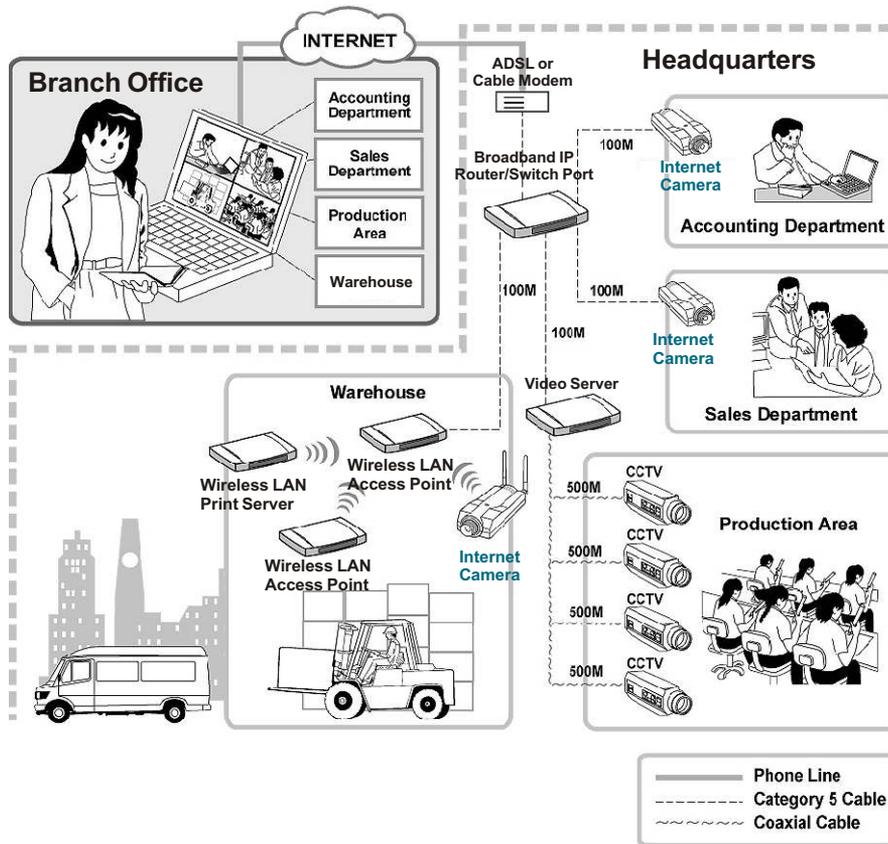

### SURVEILLANCE

