



MEGAPIXEL DAY & NIGHT WDR NETWORK CAMERA

MEGAPIXEL RESOLUTION

High-resolution images ensure that you capture the details that you need

WIDE DYNAMIC RANGE

Wide Dynamic Range technology neutralizes imperfect lighting, providing clear images with the right amount of contrast even when a subject is backlit

LOW POWER CONSUMPTION

Requires only 2 watts of power using basic configuration

HIGH RESOLUTION SURVEILLANCE

The D-Link DCS-3710 is a high-end Megapixel Day & Night WDR Network Camera, equipped with a 1/3" Megapixel WDR Progressive Scan CMOS sensor and a 2.8-12 mm DC auto iris lens. The DCS-3710 captures video in both dark and light environments, or even subjects shot against a backlight by neutralizing imperfect lighting and generating a realistic image. In addition, the removable IR-cut filter for day/night functionality provides clear detail and high quality video at any hour of the day. The DCS-3710 incorporates Power over Ethernet (PoE) and an SD card slot, allowing it to be easily installed in a variety of locations.

MULTIPLE VIDEO STREAMS

The DCS-3710 supports simultaneous streaming of MPEG-4 and MJPEG video to provide both high-quality and bandwidth-efficient compression formats. MJPEG delivers excellent file integrity, ideal for situations which require high image detail. MPEG-4 produces a small file size, making it more useful for extended recording or for use in low-bandwidth networks. Additionally, the DCS-3710 supports multicast MPEG-4 streaming allowing users to view the camera feed by subscribing to a multicast IP address on the network.

FLEXIBLE CONNECTIVITY

The DCS-3710 includes input and output ports allowing connectivity to external devices such as IR sensors, switches, and alarm relays. It also comes with an RS-485 interface, providing connectivity to an optional pan/tilt enclosure which effectively adds pan/tilt functionality to the DCS-3710. An additional 12 V interface provides power for an optional LED illuminator.

WIDE DYNAMIC RANGE (WDR) APPLICATIONS

The Wide Dynamic Range (WDR) function provides clear images even under backlit conditions where the intensity of illumination can vary significantly, making the DCS-3710 perfect for extreme high-contrast environments. For example, when placed indoors, the DCS-3710 will adjust itself to the intense sunlight that may be streaming in through a nearby window. This makes it an ideal solution for security applications.

WHAT THIS PRODUCT DOES

The DCS-3710 Megapixel Day & Night WDR Network Camera is a professional IP surveillance solution which connects to your network to provide high-quality live video over the Internet. WDR and ICR technology ensure that the images captured are clear and sharp at all times, day or night.

3GPP MOBILE SURVEILLANCE

Support for 3GPP Mobile Surveillance allows you to view a live video feed from your 3GPP compatible Internet-ready mobile device. This extends your monitoring capability, allowing you to check your camera's video feed while on the go without a computer.

FEATURES


- Up to 30 frames per second
- IR-cut removable (ICR) filter for day/night
- Simultaneous multi-profile stream support
- Built-in samba client
- SD card slot
- External microphone and speaker port for 2-way communication
- Digital I/O support for sensors and alarms
- RS-485 for connection to pan/tilt enclosure
- Built-in 802.3af PoE
- Advanced security and network management
- 3 configurable privacy masks
- Support for motion detection
- Flip & mirror images

D-VIEWCAM FEATURES

- Manage up to 32 cameras at once
- Adjustable image size and quality
- Custom recording schedules
- Event notifications
- Upload a customized floor plan

D-VIEWCAM FOR CONVENIENT MANAGEMENT

The included D-Link D-ViewCam™ is sophisticated software which enables you to manage up to 32 network cameras, set e-mail alert notifications, set recording schedules, and use motion detection to record directly to your hard drive. D-ViewCam™ also allows you to upload a floor plan of your business to create a realistic layout of where your cameras are located, further simplifying the management process.



D-ViewCam

TECHNICAL SPECIFICATIONS

GENERAL SPECIFICATIONS

- 1/3" Megapixel WDR Progressive Scan CMOS
- Removable IR-cut Filter: Auto/Schedule/Manual
- 3A Control: AGC, AWB, AES
- DC iris vari-focal lens: 2.8 to 12 mm, F1.3
- Minimum illumination: Color: 0.3 lux, B/W: 0.02 lux
- WDR SN ratio: 100 dB
- Angle of View (Horizontal): 102.2° (2.8 mm) to 23.7° (12 mm)

AUDIO

- Two-way audio
- External audio in
- External audio out
- G.726 codec

VIDEO ALGORITHMS SUPPORTED

- Simultaneous dual stream support (MPEG and MJPEG)
- Simultaneous profile support for web viewing, 3G mobile viewing, and video recording
- JPEG compression for still images

VIDEO RESOLUTION

- Supported resolutions: 1280 x 960 / 1280 x 720 / 640x480 / 320 x 240 / 160 x 120
- Up to 30 fps for all resolutions

NETWORK CONNECTIVITY

- 802.3af Power over Ethernet (PoE)
- 10/100 Mbps Fast Ethernet Auto Negotiation

I/O CONNECTORS

- 4-Pin auto iris lens connector
- DI x 2
- DO x 1
- RS-485
- 12 V DC, 200 mA Output
- SD Slot

SECURITY

- Administrator and user group protected
- Password authentication

REMOTE MANAGEMENT

- Camera confiscation and camera system log
- Take snapshots and save to hard drive via a web browser
- D-ViewCam™

NETWORKING PROTOCOLS

- IPv4, DHCP, ARP, DNS, TCP/IP, DDNS (D-Link), HTTP, HTTPS, UPnP™ Port Forwarding, Samba, SMTP, PPPoE, NTP (D-Link), FTP, RTP, RTSP, UDP, RTCP, ICMP, 3GPP

SYSTEM REQUIREMENTS FOR VIEWING

- Internet Explorer 6 or later

SYSTEM REQUIREMENTS TO RUN D-VIEWCAM™

- Operating System: Microsoft Windows® 7 / Vista / XP
- Web Browser: Internet Explorer 6 or higher
- Protocol: Standard TCP/IP

POWER INPUT

- 100-240 VAC, 50/60 Hz, 12 V DC 1.25 A

OPERATING TEMPERATURE

- 0° to 40° C (32° to 104° F)

STORAGE TEMPERATURE

- -20° to 70° C (-4° to 158° F)


HUMIDITY

- 20% to 80% non-condensing

CERTIFICATIONS

- CE (Class A)
- C-Tick (Class A)
- FCC (Class A)

CAMERA DIMENSIONS

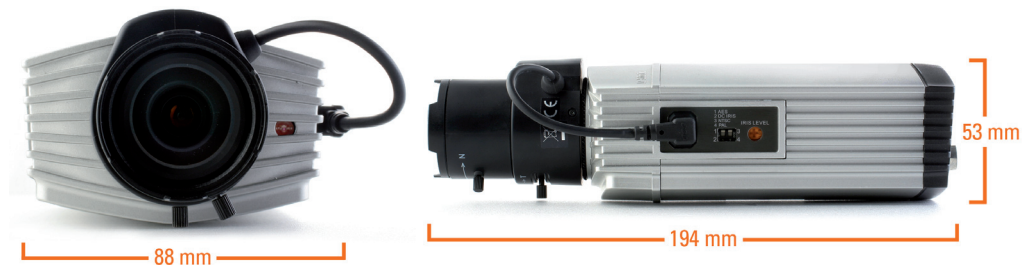

D-Link Corporation
 No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
 Specifications are subject to change without notice.
 D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
 All other trademarks belong to their respective owners.
 ©2010 D-Link Corporation. All rights reserved.
 Release 02 (July 2010)