



POWERLINE AV WIRELESS N STARTER KIT

WIRELESS N TECHNOLOGY



Wireless N offers superior wireless range and speed over conventional wireless b/g

RAPID SPEEDS OVER ELECTRICAL WIRING

Speeds of up to 200 Mbps speed over home electrical wiring, suitable for high bandwidth Internet applications

SECURITY MADE EASY

Data encryption is quickly configured with the push of a button to keep intruders out

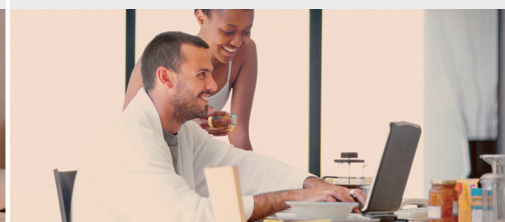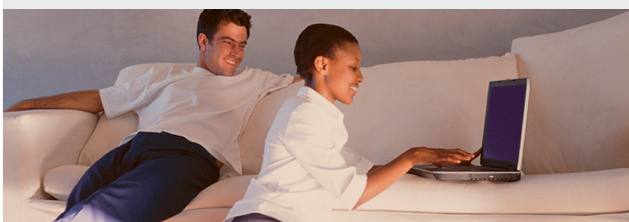

DATA TRANSMISSION OVER ELECTRICAL WIRING

The D-Link DHP-W307AV Powerline AV Wireless N Starter Kit, compliant with the HomePlug AV standard, uses your home's existing electrical wiring to create a network or extend your existing network.¹ This kit includes both a powerline adapter and a powerline wireless adapter which plug into your home's standard electrical outlets to create a powerline network and a Wireless N network. Powerline and Wireless N offer the advantage of high speed transfers without the need to install unsightly network cables.

FASTER WIRELESS SPEEDS, WIDER OPERATIONAL RANGE

The Wireless N technology incorporated into the DHP-W307AV offers increased speed and range over standard 802.11g/b. Initial wireless setup can be accomplished quickly, thanks to a convenient WPS button atop the device. WEP, WPA, and WPA2 encryption keep your network traffic safe and secure.

IDEAL FOR BANDWIDTH-INTENSIVE APPLICATIONS

The DHP-W307AV is capable of delivering data transfer rates of up to 200 Mbps.² This rapid transmission speed makes it ideal for bandwidth-intensive applications, guaranteeing smooth HD video streaming, VoIP calls, and lag-free online gaming experiences. In addition, it prioritizes Internet traffic, ensuring that multimedia applications do not experience glitches while web surfing and downloads are in progress. This device provides ample network bandwidth, enabling digital home consumers to tap into existing electrical wiring for high-quality multimedia streaming.

CONVENIENT SETUP AND SECURE OPERATION

The DHP-W307AV plugs directly into a power outlet, and does not require any additional cables. Extend your home network by connecting multiple devices in the farthest corners of your home via Ethernet cable or Wireless N. For convenient setup, wired or wireless encryption keys can be quickly configured with the push of a button atop the device. The adapter implements 128-bit AES data encryption to protect the network from unauthorized wire tapping. With hassle-free plug and play installation, the DHP-W307AV is an ideal solution to create a wall-to-wall home network.


WHAT THIS PRODUCT DOES

The DHP-W307AV allows you to connect both wired and wireless computers, high-definition TVs, networking devices, and gaming consoles using the most pervasive medium in your home - the electrical wiring. Share Internet connections and experience smooth file transfers, streaming multimedia, online gaming and more. The Powerline AV Wireless N Starter Kit features easy plug-and-play installation and can be connected to any Ethernet-enabled device.

QUALITY OF SERVICE

With Quality of Service (QoS) support, the performance of applications which require real-time communication, such as VoIP phone calls and multiplayer online games, will not be compromised even while downloading Internet TV and music.

DHP-306AV

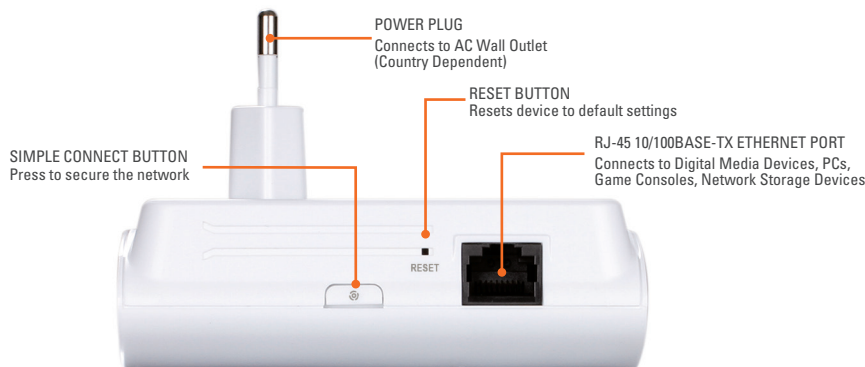

TECHNICAL SPECIFICATIONS

STANDARDS

- IEEE 802.3
- IEEE 802.3u
- HomePlug AV

POWERLINE INTERFACE

- Power plug (country-dependent)

ETHERNET INTERFACE

- 10/100BASE-TX Ethernet Port with auto MDI/ MDIX
- RJ-45 Connector

POWERLINE MODULATION SCHEME

- OFDM Symbol Modulation

POWERLINE FREQUENCY BAND

- 2MHz to 30MHz

DATA RATE

- Powerline: 200Mbps (PHY rate)
- Ethernet: 10/100Mbps (autonegotiation)

QoS

- Integrated QoS prioritizes media and data

SECURITY

- 128-bit AES Data Encryption

MINIMUM SYSTEM REQUIREMENTS (FOR PC UTILITY SOFTWARE)

- PC with 200 MHz processor
- 64MB memory
- Windows 7, Vista, XP SP2 or 2000 SP4
- Ethernet interface (100Mbps)

LEDS

- Power
- Powerline
- Ethernet

POWER INPUT

- 100 to 240 V AC, 50/60 Hz

POWER SAVING

- Power saving mode supported

DIMENSIONS

- 100 x 70 x 34 mm

WEIGHT

- 126 g (0.3 lb)

OPERATING TEMPERATURE

- 0° to 40° C (30° to 104° F)

OPERATING HUMIDITY

- 10% to 95% non-condensing

EMC CERTIFICATION

- CE EMC Class B


SAFETY CERTIFICATION

- UL
- CE LVD


¹ Power outlets and electrical wiring must all be part of the same electrical system. Certain electrical conditions in your home, such as wiring condition and configuration, may affect the performance of this product. Additional D-Link Powerline AV adapters are required to add new devices to the network. A minimum of two D-Link Powerline AV Network Adapters are required to create a network. Connecting this product to a power strip with a surge protector may adversely affect the performance of this product. For best results, plug the adapter directly into a wall outlet.

² Maximum throughput based on theoretical transmission PHY rate. Actual data throughput will vary. Network conditions and environmental factors, including volume of traffic and network overhead, may lower actual data throughput rate. Interference from devices that emit electrical noise, such as vacuum cleaners and hair dryers, may adversely affect the performance of this product. This product may interfere with devices such as lighting systems that have a dimmer switch or a touch-sensitive on/off feature, short wave radios, or other Powerline devices that do not follow the HomePlug AV standard.

YOUR NETWORK SETUP

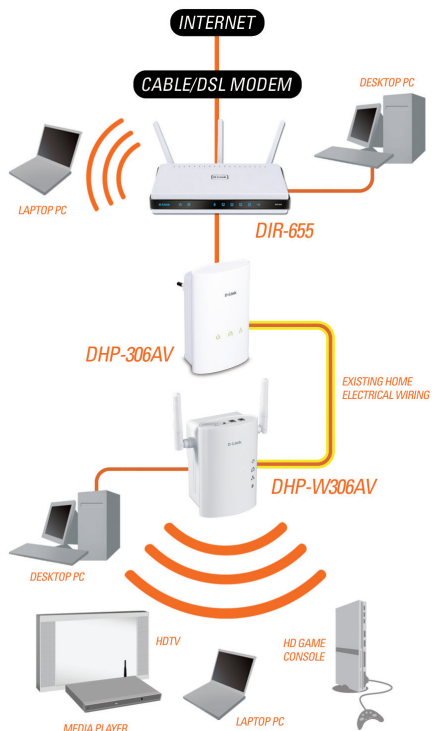

DHP-W306AV

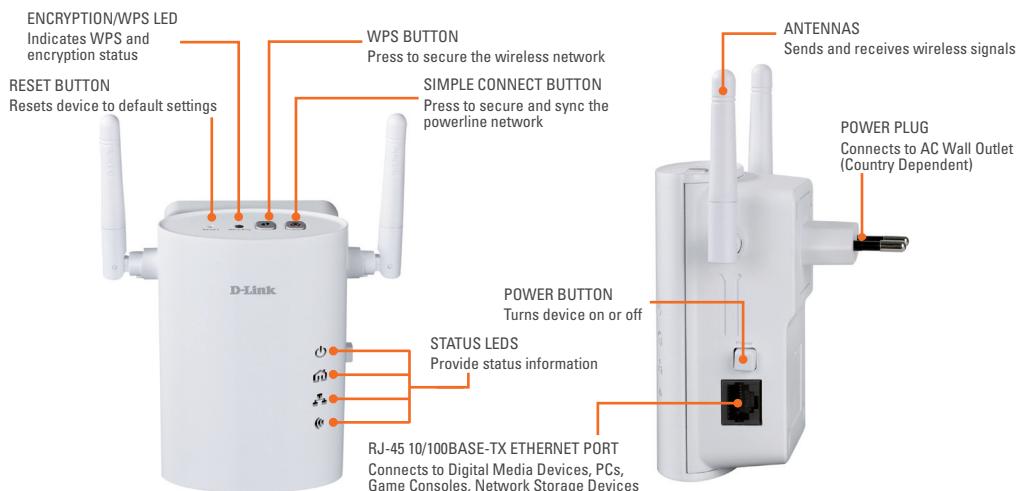

TECHNICAL SPECIFICATIONS

STANDARDS

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.11n
- HomePlug AV

POWERLINE INTERFACE

- Power plug (country-dependent)

ETHERNET INTERFACE

- 10/100BASE-TX Ethernet Port with auto MDI/MDIX
- RJ-45 Connector

POWERLINE MODULATION SCHEME

- OFDM Symbol Modulation

POWERLINE FREQUENCY BAND

- 2 MHz to 30 MHz

DATA RATE

- Powerline: 200 Mbps (PHY rate)
- Ethernet: 10/100 Mbps (autonegotiation)
- Wireless: Up to 300 Mbps³

³ Theoretical maximum for devices on the same network.

QoS

- Integrated QoS prioritizes media and data

WIRELESS FREQUENCY RANGE

- 2.4 GHz to 2.497 GHz

ANTENNAS

- Two fixed external 2 dBi omni-direction antennas

SECURITY

- 128-bit AES Data Encryption
- WEP 64/128-Bit Data Encryption
- Wi-Fi Protected Access (WPA/WPA2)
- WPS™

LEDS

- Power
- Powerline
- Ethernet
- WLAN

POWER INPUT

- 100 to 240 V AC, 50/60 Hz

POWER SAVING

- Power saving mode supported

DIMENSIONS

- 105 x 70 x 52 mm (4.1 x 2.8 x 2.0 inches)

WEIGHT

- 208 g (0.46 lb)

OPERATING TEMPERATURE

- 0° to 40°C (30° to 104°F)

OPERATING HUMIDITY

- 10% to 95% non-condensing

QUICK SETUP WIZARD

- D-Link Click and Connect (DCC)

EMC CERTIFICATION

- CE EMC Class B

SAFETY CERTIFICATION

- UL
- CE LVD
- Wi-Fi



D-Link Corporation
 No. 289 Xinhua 3rd Road, Neihu, Taipei 114, Taiwan
 Specifications are subject to change without notice.
 D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
 All other trademarks belong to their respective owners.
 ©2011 D-Link Corporation. All rights reserved.
 Release 01 (January 2011)