

Product Highlights

Wireless N Connectivity with Extender Mode

Enable the latest in wireless technology in hard to reach places around your home or office and enhance your existing network with faster, stronger coverage

Sound and Motion Detection with Night Vision

Never miss an important moment with the ability to be alerted to either sound or motion activation, night vision ensures that even low light areas are viewable

mydlink Cloud Service Enabled Device

Stay connected to everything you love from anywhere, anytime, the mydlink service provides peace of mind when away from the home or office



DCS-933L

Wireless N H.264 Day/Night Network Camera

Features

Multimedia

- Real-time H.264 and MJPEG compression
- Sound level detection

Security

- Send snapshots or video clips to your FTP site or via E-mail
- Remote video monitoring and recording

Camera

- High quality VGA CMOS sensor for excellent image quality
- Built-in IR LED to capture video in low-light environments

Ease Of Use

- UPnP & DDNS support for network configure
- WPS support

Networking

- mydlink enabled
- Wireless 802.11n connection
- Extender mode expands wireless coverage area

The DCS-933L Wireless N H.264 Day/Night Network Camera is a versatile and unique solution for your small office or home. Unlike a standard webcam, the DCS-933L is a complete system with a built-in CPU and web server that transmits high quality video images for security and surveillance.

Peace Of Mind With 24/7 Monitoring Of Any Environment

The DCS-933L is a standalone surveillance camera that requires no special hardware or software, and can run independently even without a PC. Send e-mail notifications with snapshots or video clips whenever motion or sound is detected using just the DCS-933L and an internet connection. You can customize areas of the video to monitor for motion to keep watch over entryways, and you can set volume limits to detect when a loud sound is picked up by the camera. Night time monitoring is possible with the built-in infrared LEDs which allow for night time viewing of up to 16 feet (5 meters), enabling round-the-clock monitoring of a home or small office.

Full Featured Surveillance System


Included with the DCS-933L is the D-ViewCam software, which adds enhanced features and functionality that helps you create a full surveillance system. D-ViewCam enables centralized management of multiple network cameras, supporting up to 32 network cameras and up to 64 users. With a dedicated computer it offers digital monitoring and recording with a wide array of features, including scheduled, motion and manual recording options for individual needs.

The Fastest Technology, The Strongest Coverage

Offering wireless 802.11b/g/n and Ethernet/Fast Ethernet connectivity, the DCS-933L is a snap to integrate into your existing network environment. You can use the DCS-933L's Extender Mode to extend the range of your wireless network, giving your home or office better wireless coverage. This will help a home wireless network to eliminate dead spots and allow for the addition of other wireless devices easily.

Instant Anywhere Access With mydlink Cloud Service

Enhanced with mydlink™ support DCS-933L makes it easier and more convenient for you to look after your family and home or office environment. With a mydlink service enabled camera, you can stay connected to everything you love from anywhere, anytime. The mydlink service can be accessed by a web browser and also provides an optional downloadable mydlink app that allows users to have a better experience on their mobile devices. With the mydlink app, you can quickly and easily view your camera feed from anywhere using a Wi-Fi, 3G or 4G connection.

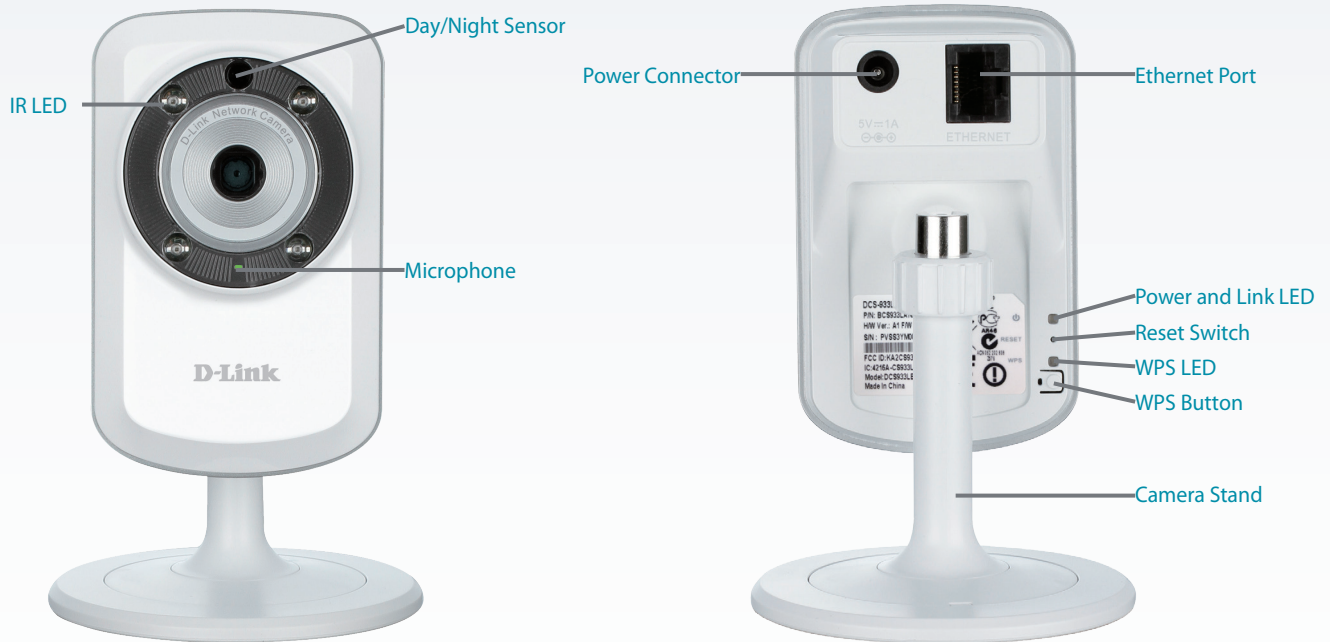

Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/5"VGA progressive CMOS sensor • 5 meter IR illumination distance minimum illumination 0 lux with IR LED on • Built-in Infrared-Cut Removable (ICR) Filter module • 4X digital zoom • Fixed length 3.15 mm • Aperture F2.8 	<ul style="list-style-type: none"> • Angle of view <ul style="list-style-type: none"> • (H) 45.3° • (V) 34.5° • (D) 54.9° • Exposure Time: 1/15~1/15,000 sec. • Built-in Microphone
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Configurable brightness, saturation, contrast
Video Compression	<ul style="list-style-type: none"> • H.264/MJPEG format compression simultaneously 	<ul style="list-style-type: none"> • JPEG for still image
Video Resolution	<ul style="list-style-type: none"> • 640 x 480, 320 x 240, 160 x 112 at frame rates up to 30 fps 	
Audio Compression	<ul style="list-style-type: none"> • PCM 	
Connectivity	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet port 	<ul style="list-style-type: none"> • 802.11n wireless

DCS-933L Wireless N H.264 Day/Night Network Camera

Network		
Network Protocols	<ul style="list-style-type: none"> • IPv4, ARP, TCP, UDP, ICMP • DHCP Client • NTP Client (D-Link) • DNS Client • DDNS Client (D-Link) • SMTP Client 	<ul style="list-style-type: none"> • FTP Client • HTTP Server • PPPoE • UPnP Port Forwarding • LLTD
Security	<ul style="list-style-type: none"> • Password authentication 	<ul style="list-style-type: none"> • HTTP digest encryption
System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> • Operating system: Microsoft windows, XP, Vista, 7, 8 • Browser: Internet Explorer, Firefox, Safari, Chrome 	
Event Management	<ul style="list-style-type: none"> • Motion detection • Sound level detection 	<ul style="list-style-type: none"> • Event notification and uploading of snapshots/video clips via SMTP or FTP
Remote Management	<ul style="list-style-type: none"> • Configuration accessible via web browser 	
Mobile support	<ul style="list-style-type: none"> • mydlink Lite app for iOS and Android 	
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> • Operating System: Microsoft Windows 7 / Vista / XP • Web Browser: Internet Explorer 7 or higher 	<ul style="list-style-type: none"> • Protocol: Standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> • Remote management/control of up to 32 cameras • Viewing of up to 32 cameras on one screen • Supports all management functions provided in web interface 	<ul style="list-style-type: none"> • Scheduled motion triggered, or manual recording options
General		
Dimensions, including base	<ul style="list-style-type: none"> • 80 x 115 x 80 mm (3.14 inches x 4.52 inches x 3.14 inches) 	
Weight	<ul style="list-style-type: none"> • 96.2 grams (0.21 lbs) 	
Power	<ul style="list-style-type: none"> • 5 V DC 1 A, 50/60 Hz 	
Power Consumption	<ul style="list-style-type: none"> • 4 watts 	
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> • Storage: -20 to 70° C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 20% to 80% non-condensing 	<ul style="list-style-type: none"> • Storage: 20% to 80% non-condensing
Certifications	<ul style="list-style-type: none"> • CE, CE LVD, FCC, C-Tick 	

Updated 2013/02/20