

Full-Featured Internet Camera

Home & Office Security Surveillance

- Remote Audio/Video Surveillance
- Take Snapshots/Record to Hard Drive via Web Browser
- Capture Video in Low Light Environment
- Motion-Detection Triggered Recording/E-mail Alerts
- With or Without 802.11g Wireless Connection

FEATURES

Audio/Video Recording

- MPEG4 Compression Mode
- Motion-Detection Recording

Audio Sound/Video Monitoring

- 640 x 480 Video Resolution
- Up to 30 Frames Per Second Video
- 0.5 Lux/f2.8 Low Light Sensitivity
- Built-in Microphone for Sound Surveillance/Audio Recording

Security

- Motion-Detection Alarms
- Email Notification
- WEP Data Encryption/Wi-Fi Protected Access (WPA) Security *

Multiple Connectivity Options

- 10/100Mbps Ethernet for LAN or Internet Connection
- 802.11g Wireless LAN (Up to 54Mbps Speed) *

* DCS-950G only

The D-Link DCS-950/DCS-950G Internet camera is an affordable full-featured surveillance system designed for home and the small office. It connects to the broadband Internet or a local network to provide remote high-quality audio and video monitoring. You can access and control the camera using an Internet browser. As you watch and listen remotely to video and sound obtained by the camera, you can take snapshots or record directly from the web browser to a local hard drive. With motion detected image recording, alert message and powerful software for multi-camera monitoring and management, this camera provides a comprehensive system for convenient surveillance from both a local site or remotely from anywhere in the world.

By signing up with one of the many free Dynamic DNS services available on the Web, you can assign an easy-to-remember name and domain to the camera (such as www.mycamera.myddns.com). This allows you to remotely access your camera without having to remember the IP address, even if your Internet Service Provider has changed it.

Motion Detected Recording. Instead of recording 24 hours a day, 7 days a week, images can be recorded when motions are detected. This saves disk space and eliminates the time wasted to view unnecessary images. Playback consumes little time with triggered event browsing and fast database searching.

Multiple Camera Monitoring. You can remotely monitor your camera using a web-based interface or the bundled advanced software. Up to 10 users can simultaneously view the live feed from the camera. Using the centralized surveillance software supplied with this camera, you can monitor and manage multiple cameras, set recording schedules, configure motion detection settings, and change settings to multiple cameras.

With or Without Wireless Connection. Two camera models are available for selection: the DCS-950 with an Ethernet port, and the DCS-950G wireless camera with both Ethernet and 802.11g WLAN interfaces. The wireless model offers installation flexibility and freedom of wireless connectivity at difficult locations without the hassle of running Ethernet cables. This wireless camera supports WPA-PSK, TKIP, and WEP for establishing secure connections to your wireless network.

The DCS-950G wireless camera also works great with D-Link's DSM-320 Wireless Media Player. After setting up the DCS-950G to record to your PC's hard drive or a network-attached storage, captured video can be wirelessly streamed to the DSM-320 and displayed on your TV screen. Now you can see what took place throughout the rest of your home - all from the comfort of your living room.



Specification Chart


DCS-950

DCS-950G



Hardware & System	RAM	32MB	32MB
	Flash	4MB	4MB
	O. S. Support	Windows 98SE, ME, 2000, XP	Windows 98SE, ME, 2000, XP
	Browser Support	Internet Explorer 5.x & Above	Internet Explorer 5.x & Above
Network Connection	Ethernet	10/100BASE-TX Port	10/100BASE-TX Port
	Wireless LAN	-	√
	Standard	-	802.11g
	Data Rates	-	Up to 54Mbps
	Antennas	-	2dBi Gain Detachable Diversity Antenna (RP-SMA Connector)
	Transmitter Output Power	-	15 dBm +/- 2 dB
Software Functions	Communication Protocols	TCP/IP, UDP, HTTP, SMTP, NTP, DNS, DHCP, ARP, ICMP, BOOTP	
	Universal Plug and Play (UPnP)	√	√
	Dynamic DNS Services (DDNS)	√	√
	Time Synchronisation With NTP Server	√	√
	Text, Date & Time Overlay	√	√
	Playback Schemes	Date, Time Interval, Event Triggering	Date, Time Interval, Event Triggering
	View Snapshots	√	√
	Save Snapshots	√	√
	Motion Detection Alarm	√	√
	Email Notification	√	√
Management & Firmware Updates	Management Site	Local & Remote	Local & Remote
	Using Web Browser	√	√
	Max. Cameras on Single Screen*	16	16
	Reset Button	√	√
	Max. Users Accessing Camera Simultaneously	10	10
Camera Specifications	Lens (Focal Length, Aperture)	4.5mm, f2.8	4.5mm, f2.8
	Sensor Resolution	640 x 480	640 x 480
	Image Sensor	1/4-inch Color CMOS Sensor, Progressive Scan Mode	1/4-inch Color CMOS Sensor, Progressive Scan Mode
	Lens Type	Fixed Lens	Fixed Lens
	Illumination	Min. 0.5 lux	Min. 0.5 lux
	Automatic Gain Control (AGC)	20dB	20dB
	Automatic White Balance (AWB)	√	√
	Automatic Exposure (AE)	√	√
	Back Light Compensation (BLC)	√	√
	Electronic Shutter	√	√
	Shutter Speed	1/60 to 1/15,000 sec.	1/60 to 1/15,000 sec.
Video	Color Selection	Color	Color
	Image Frame Rate	Up to 30fps	Up to 30fps
	Image Compression	MPEG4	MPEG4
	Compression Ratios	5 Levels	5 Levels
	Resolution	160 x 120 @ 30fps, 320 x 240 @ 30fps, 640 x 480 @ 30fps	160 x 120 @ 30fps, 320 x 240 @ 30fps, 640 x 480 @ 30fps
	Viewing System Required Protocol	ActiveX	ActiveX
	Scheduled Recording	√	√
	Brightness Control	√	√
	Contrast Control	-	-
	Saturation	-	-
Audio	Built-in Microphone	√	√
	Sampling Rate	8Kbps	8Kbps
	Audio Recording	√	√

* Up to 4 cameras using IPView SE software, up to 16 cameras using D-ViewCam future release software.

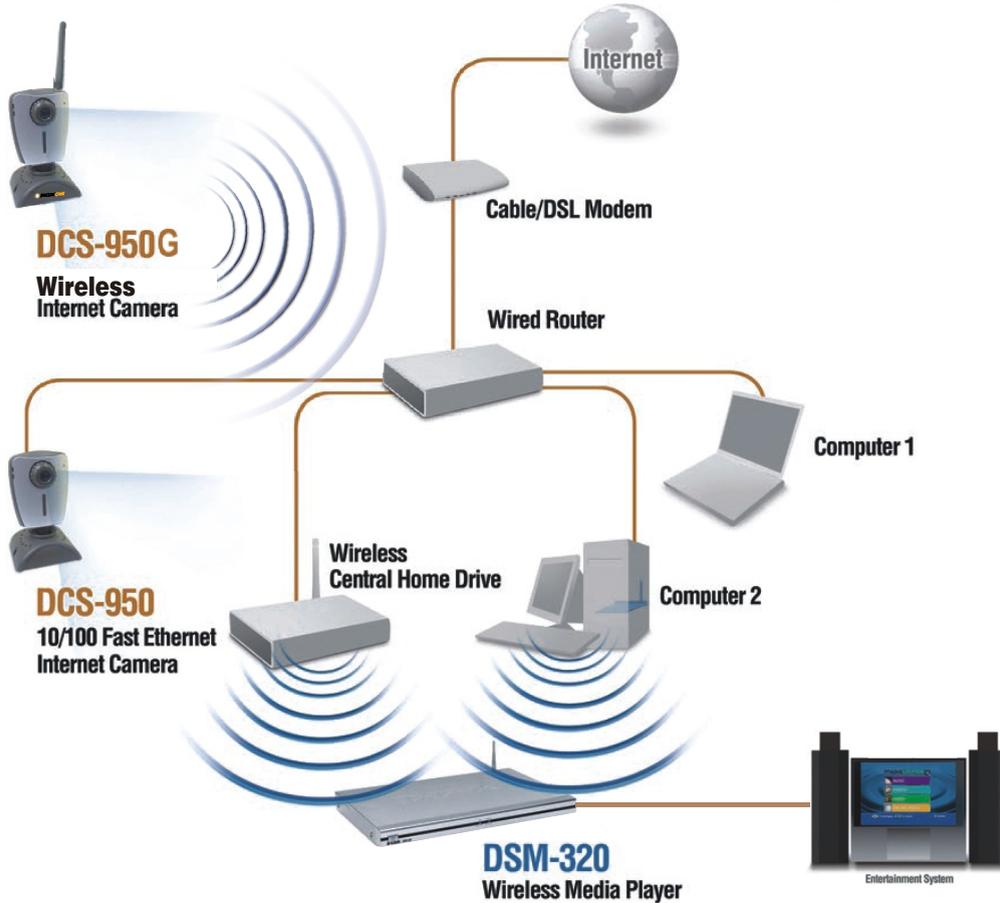

Physical & Environmental

Diagnostic LEDs

- Power
- Activity

Input Power

5VDC, 2.5A
Through External Power Adapter

Dimensions

77 (W) x 50 (D) x 140 (H) mm

Weight

- 180 grams (DCS-950)
- 200 grams (DCS-950G)

Operating Temperature

0° to 50°C

Storage Temperature

-25° to 60°C

Humidity

Max. 95% RH, non-condensing

EMC

- FCC Class B
- CE
- C-Tick
- IC

Safety

LVD (En60950)



ACN 052 202 838

D-Link Worldwide Offices

U.S.A. TEL: 1-800-326-1688
Canada TEL: 1-905-8295033
Europe (U. K.) TEL: 44-20-8731-5555
Germany TEL: 49-6196-77990
France TEL: 33-1-30238688
Netherlands TEL: 31-10-282-1445
Belgium TEL: 32(0)2-517-7111
Italy TEL: 39-02-2900-0676
Sweden TEL: 46-(0)8564-61900
Denmark TEL: 45-43-969040
Norway TEL: 47-99-300-100
Finland TEL: 358-9-2707 5080
Spain TEL: 34-93-4090770
Portugal TEL: 351-21-8688493
Czech Republic TEL: 420-(603)-276-589
Switzerland TEL: 41-(0)-1-832-11-00
Greece TEL: 30-210-9914 512

TEL: 1-866-743-4905
 FAX: 1-905-8295223
 TEL: 44-20-8731-5511
 FAX: 44-20-8731-5511
 TEL: 49-6196-7799300
 FAX: 33-1-30238689
 TEL: 31-10-282-1331
 FAX: 31-10-282-1331
 TEL: 32(0)2-517-6500
 FAX: 39-02-2900-1723
 TEL: 46-(0)8564-61901
 FAX: 46-(0)8564-61901
 TEL: 45-43-424347
 FAX: 47-22-309580
 TEL: 358-9-2707-5081
 FAX: 34-93-4910795

TEL: 41(0)-1-832-11-01
 FAX: 30-210-9916902

Luxemburg
Poland
Hungary
Singapore
Australia
India
Middle East (Dubai)
Turkey
Egypt
Israel
LatinAmerica
Brazil
South Africa
Russia
China
Taiwan
Headquarters

TEL: 32-(0)2-517-7111
 TEL: 48-(0)-22-583-92-75
 TEL: 36-(0)-1-461-30-00
 TEL: 65-6774-6233
 TEL: 61-2-8899-1800
 TEL: 91-022-26526696
 TEL: 971-4-3916480
 TEL: 90-212-289-56-59
 TEL: 202-414-4295
 TEL: 972-9-9715700
 TEL: 56-2-232-3185
 TEL: 55-11-218-59300
 TEL: 27-12-665-2165
 TEL: 7-095-744-0099
 TEL: 86-10-58635800
 TEL: 886-2-6600-0123
 TEL: 886-2-6600-0123

FAX: 32-(0)2-517-6500
 FAX: 48-(0)-22-583-92-76
 FAX: 36-(0)-1-461-30-09
 FAX: 65-6774-6322
 FAX: 61-2-8899-1868
 FAX: 91-022-26528914
 FAX: 971-4-3908881
 FAX: 90-212-289-76-06
 FAX: 202-415-6704
 FAX: 972-9-9715601
 FAX: 56-2-232-0923
 FAX: 55-11-218-59322
 FAX: 27-12-665-2186
 FAX: 7-095-744-0099 #350
 FAX: 86-10-58635799
 FAX: 886-2-6600-8168
 FAX: 886-2-6600-9898