


DP-300U

Now Includes  
**USB Port**

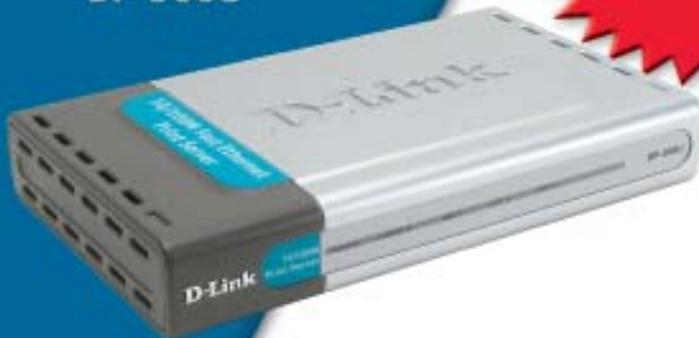

- Share multiple printers in your network
- Easily configurable with Web Browser or Windows based configuration program
- 2 parallel and 1 USB port for connection to virtually all available printers
- Compact size for convenient placement

## Express EtherNetwork *Multi-Port* Print Server

D-Link, the industry pioneer in networking continues to offer innovative products in Ethernet. The D-Link DP-300U is a compact print server that connects to your Ethernet or Fast Ethernet network. With high-speed ports, DP-300U allow users to print simultaneously from anywhere on the network.

DP-300U is equipped with two IEEE1284 parallel ports and one USB version 1.1 port for seamless connection to most printers available on the market today. DP-300U also supports all major network Operating Systems and protocols. With its compact size, DP-300U can easily be placed anywhere!

DP-300U is also easily configurable using web browser or window based configuration program. Using web browsers on a PC connected to the network, configuration is simple and straightforward with the familiar D-Link interface. PS Admin, a Windows based configuration program can also be use to configure DP-300U.

The DP-300U print server is the ideal network printing solution for small offices, home offices, schools and other businesses that requires printer sharing.



# Express EtherNetwork Print Server



DP-300U

## SPECIFICATIONS

### Standards

- IEEE 1284
- IEEE 802.2
- IEEE 802.3
- IEEE 802.3u
- USB 1.1

### Port

- 10/100 Mbps Fast Ethernet
- Two IEEE 1284 Parallel Ports
- USB 1.1 Port

### Data Transfer Rate

10/100Mbps

### Transport Protocols

- TCP/IP
- NetBEUI
- AppleTalk / EtherTalk

### TCP/IP Protocols Supported

- BOOTP
- SNMP
- Telnet
- TFTP
- FTP
- LPD
- RARP
- DHCP

### Management

SNMP

### MIBs

MIB-II (RFC 1213)

### Diagnostic LEDs

- Power
- Link/Act
- USB
- LTP1
- LTP2

### Power Input

External Power Supply  
DC 5V, 2.5A

### Dimensions

- L=7.59" (193mm)
- W=4.6" (118mm)
- H=1.22" (31mm)

### Weight

0.64 lbs (292g)

### Operating Temperature

0°C to 50°C

### Storage Temperature


-25°C to 55°C

### Humidity

5% to 95%  
non-condensing

### Warranty

1 Year

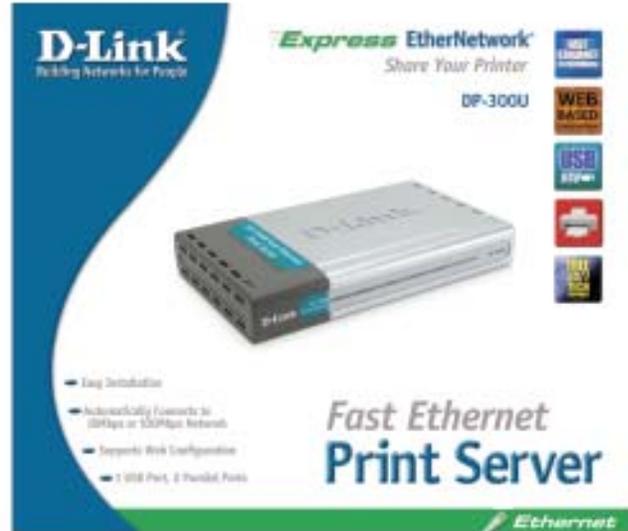

D-Link Systems, Inc. 53 Discovery Drive Irvine CA 92618 www.dlink.com  
 © 2002 D-Link Systems, Inc. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.  
 Other trademarks or registered trademarks are the property of their respective manufacturers or owners. Price and  
 specifications are subject to changes without notice. See inside package for warranty details.  
 \*24/7 Tech Support is available only in USA.