

AirPlus



DI-614+

Wireless Internet Gateway router for broadband connection.

802.11b Wireless Cable/DSL Router With 4-Port Switch

The DI-614+ AirPlus is a 2.4GHz 802.11b Wireless broadband Internet Gateway Router with a built-in 4-port Fast Ethernet Switch. It incorporates a wireless LAN Access Point with enhanced speeds of up to 22Mbps. Designed for the small office and home, this router lets you quickly and easily share DSL or cable modem Internet connection, with or without the network wires. With advanced functions traditionally found in business-class routers also built inside, the DI-614+ gives the business and home a cost-effective way to install a secure and fast network with bottleneck-free link to the outside world.

Simplified, Cost-saving Broadband Internet

With the DI-614+, you can share your broadband line and cable/DSL modem anywhere in your office or home. To let everybody logon, this device automatically creates and assigns an IP number for each user, simplifying every one's logon operation.

Ready Connection

With built-in wireless LAN Access Point and 10/100Mbps switch, the DI-614+ provides ready connection for workstations and servers, with or without the network wires. The built-in functions also save you the cost and trouble of installing a separate Access Point and Ethernet switch.

Enhanced Wireless Speeds

The built-in Access Point enables the DI-614+ to be used in larger wireless networks in conjunction with other standards-based wireless LAN Access Points. At 22Mbps, the DI-614+ provides 802.11b wireless LAN users a high data transfer rate within the industry standard. This speed is double the 11Mbps normally found in other 802.11b 2.4GHz wireless devices.

Network Security

The DI-614+ provides NAT protection for your office and home users from Internet intruders and hacker attacks, plus VPN pass-through for extra security. It blocks and re-directs certain ports to limit the services that outside users can access your network. Virtual Server Mapping is used to re-task services to multiple servers. The DI-614+ can be set to allow separate FTP, Web, and Multiplayer game servers to share the same Internet-visible IP

address while still protecting your servers and workstations from hackers. Protection for wireless users is provided through a 256-bit strong WEP data encryption scheme.

DMZ Host to Open Public Domain

You can configure any of the built-in LAN ports to function as a DMZ port. A DMZ setting can be applied to a single client (such as a Web server) behind the router to fully expose it to the Internet and ensure complete Internet application compatibility even if the specific port is not known. This allows you to set up web sites and e-commerce business from your office while maintaining protection for the rest of your office LAN.

UPnP Enabled for Compatibility

The DI-614+ is designed for easy and robust connectivity among heterogeneous standards-based network devices. Computers can communicate directly with the DI-614+ for automatic opening and closing of UDP/TCP ports to take full advantage of security provided without sacrificing functionality of on-line applications.

Network Timing Protocol (NTP) Support

The DI-614+ supports the Network Timing Protocol (NTP), allowing you to install a time server behind the router to synchronize time for your network environment. This protects you from the risks inherent in obtaining Internet, minimizes security risks from the outside, and maximizes timing accuracy on your network.

Features

- Wireless or wired Internet access through a broadband modem
- Cable/DSL modem Internet sharing
- Built-in 4-port Fast Ethernet switch
- Integrated 22Mbps enhanced-speed IEEE 802.11b wireless LAN Access Point
- NAT routing security
- Virtual Private Network (VPN) pass-through support
- 256-bit WEP data encryption for wireless users
- DMZ and Virtual Server Mapping support
- Network Timing Protocol support
- Web-based and Telnet configuration
- SNMP agent & built-in MIBs for management on third-party platforms
- Sturdy, compact, wall-mountable case

Router

CPU
ARM-7

WAN Interface

- 1 RJ-45 10BASE-T port
- Supports PPPoE for DSL and cable modem connection

LAN Interfaces

- 802.11b wireless LAN (22Mbps)
- 4 RJ-45 10BASE-T/100BASE-TX ports

Routed Packet Type

IP packets

Routing Protocols & Methods

- RIP-1, RIP-2
- Static Routing
- Dynamic Routing

VPN Support

IPSec pass-through

Internet Gateway Functions

- Network Address Translation (NAT)
- DHCP server (for automatic IP assignment)

Number of DMZ Ports

1 port (user-assignable to any LAN port)

Number of Virtual Server Mappings

10 entries

RFC Support

- > RFC 0768 - User Datagram Protocol
- > RFC 0791 - Internet Protocol
- > RFC 0792 - Internet Control Message Protocol
- > RFC 0793 - Transmission Control Protocol
- > RFC 0821 - Simple Mail Transfer Protocol
- > RFC 0826 - Ethernet Address Resolution Protocol
- > RFC 1058 - Routing Information Protocol
- > RFC 1112 - IGMP v1 (for UPNP and IAPP functions)
- > RFC 1157 - Simple Network Management Protocol
- > RFC 1213 - Management Information Base-II (MIB II)
- > RFC 1332 - PPP Internet Control Protocol
- > RFC 1350 - TFTP Protocol (Reversion 2)
- > RFC 1514 - Dynamic Host Configuration Protocol
- > RFC 1631 - IP Network Address Translator
- > RFC 1661 - Point-to-Point Protocol (PPP)
- > RFC 1723 - RIP-2 - Carrying Additional Information
- > RFC 1945 - Hypertext Transfer Protocol HTTP/1.1 (subset)
- > RFC 1994 - PPP Challenge Handshake Authentication Protocol (CHAP)
- > RFC 2132 - DHCP Options and BOOTP vendor Extensions
- > RFC 2516 - PPP Over Ethernet (PPPoE)

IP Number Self-identification

Through DHCP client

Configuration & Management

- Web-based configuration
- Telnet configuration
- SNMP agent with built-in MIB-II
- Network Timing Protocol (NTP) support
- UPnP support
- Factory reset (through reset button)

Firmware Upgrade

Through TFTP

Memory

- SDRAM: 2MB
- Flash: 512KB

Built-in Wireless LAN Access Point

Standard
IEEE 802.11b

Reception Sensitivity Nominal Temp Range

- 22Mbps: 10-5 BER @ -80 dBm minimum
- 11Mbps: 10-5 BER @ -79 dBm minimum
- 5.5Mbps: 10-5 BER @ -83 dBm minimum
- 1Mbps: 10-5 BER @ -89 dBm minimum

Frequency Range

- 2.4 - 2.4835 GHz

Modulation Techniques

- Direct Sequence Spread Spectrum (DSSS)
- Packet Binary Convolutional Coding (PBCC)

Data Rates

- 22 Mbps
- 11 Mbps
- 5.5 Mbps
- 2 Mbps
- 1 Mbps
- Auto fall-back

Data Rate & Modulation

- 22Mbps/8.5db: PBCC
- 11Mbps/4.5db: PBCC
- 11Mbps/8.5db: CCK
- 5.5Mbps/1.5db: PBCC
- 5.5Mbps/5.5db: CCK
- 2Mbps/3db: Barker

Operating Channels

- North America (FCC): 11
- Canada (DOC): 11
- Europe (ETSI): 13 (Except Spain and France)
- Japan (MKK): 14

Antennas

2 detachable 2dBi Gain antennas (reverse SMA connectors)

Operating Range

- Up to 100 m (328 feet) indoors
- Up to 400 m (1,312 feet) outdoors

Operating Modes

- Access Point
- Access Point to Access Point bridging

Roaming

Among Access Points on the same subnet

Security

- Data encryption: 64-bit, 128-bit, 256-bit WEP (Wired Equivalent Privacy)
- User-definable node access control list

Built-in Fast Ethernet Switch

Standards

- IEEE 802.3 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- ANSI/IEEE 802.3 NWay auto-negotiation

Supported Functions

- Full/half duplex (per port)
- MDI-II/MDI-X auto uplink (per port)
- Auto correction of twisted-pair Rx reverse polarity (per port)

Flow Control

- IEEE 802.3x Flow Control in full-duplex
- Back pressure in half-duplex

Transmission Method

Store-and-forward

DI-614+

Technical Specifications

2.4GHz Wireless Broadband Router

MAC Address Learning

Automatic update

Physical & Environmental

Diagnostic LEDs

- Power (status)
- M1 (system ready)
- M2 (system initial/backup/firmware download)
- WAN (Link/Activity)
- WLAN (status)
- 1, 2, 3, 4 LAN ports (Link/Activity)

Power Input

- DC 5V 2.5A
- Through external AC power adapter

Dimensions

235 x 190 x 39 mm (9.25 x 6.5 x 1.375 inches)

Weight

907 grams (2.0 lb.)

Storage Temperature

0° - 55° C (32° - 131°F)

Operating Temperature

0° - 55° C (32° - 131°F)

Humidity

95% maximum non-condensing

EMI Certification

- FCC Class B
- CE Class B

Safety Certification

- UL

Compatibility

Wi-Fi™



ACN 052 202 838



Ordering Information

Wireless Broadband Internet Gateway Router

- DI-614+** 1 RJ-45 10BASE-T port (for ADSL/cable modem connection)
- IEEE 802.11b wireless LAN AP
- 4 RJ-45 10BASE-T/100BASE-TX switch ports

Please specify one of the following after the model number:

- DI-614+/ANA** Includes USA standard AC power adapter, North America frequency
- DI-614+/BEU** Includes U.K. standard AC power adapter, EU frequency
- DI-614+/EEU** Includes EU standard AC power adapter, EU frequency
- DI-614+/EFR** Includes EU standard AC power adapter, France frequency
- DI-614+/CN** Includes China standard AC power adapter, EU frequency
- DI-614+/NEU** Includes Australia standard AC power adapter, EU frequency
- DI-614+/UNA** Includes no AC power adapter, North America frequency




Specifications subject to change without prior notice.
D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

U.S.A.	TEL: 1-949-788-0805	FAX: 1-949-753-7033	www.dlink.com
Canada	TEL: 1-905-8295033	FAX: 1-905-8295095	www.dlink.ca
Europe	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
U.K.	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	www.dlink.de
France	TEL: 33-1-30238688	FAX: 33-1-30238689	www.dlink-france.fr
Benelux	TEL: 31-40-2668713	FAX: 31-40-2668666	www.dlink-benelux.nl
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	www.dlink.it
Iberia	TEL: 34-93-4090770	FAX: 34-93-4910795	www.dlinkiberia.es
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	www.dlink.se
Norway	TEL: 47-22-991890	FAX: 47-22-207039	www.dlink.no
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	www.dlink.dk
Finland	TEL: 358-9-622-91660	FAX: 358-9-622-91661	www.dlink-fi.com
Singapore	TEL: 65-774-6233	FAX: 65-774-6322	www.dlink-intl.com
Australia	TEL: 61-2-94177100	FAX: 61-2-94171077	www.dlink.com.au
Japan	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868	www.dlink.co.jp
China	TEL: 86-10-8809-7777	FAX: 86-10-8809-6789	www.dlink.cn
India	TEL: 91-22-652-6696	FAX: 91-22-652-8914	www.dlink-india.com
Middle East	TEL: 202-6356176	FAX: 202-6356192	www.dlink-me.com
South America	TEL: 56-2-232-3185	FAX: 56-2-232-0923	www.dlink.cl
South Africa	TEL: 27(0)126652165	FAX: 27(0)126652186	www.d-link.co.za
Russia	TEL: 7-095-737-3389	FAX: 7-095-737-3390	www.dlink.ru
Taiwan	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515	www.dlinktw.com.tw
D-Link Corp.	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299	www.dlink.com.tw



RECYCLABLE
Rev. 01 (July 2002)
Printed in Taiwan

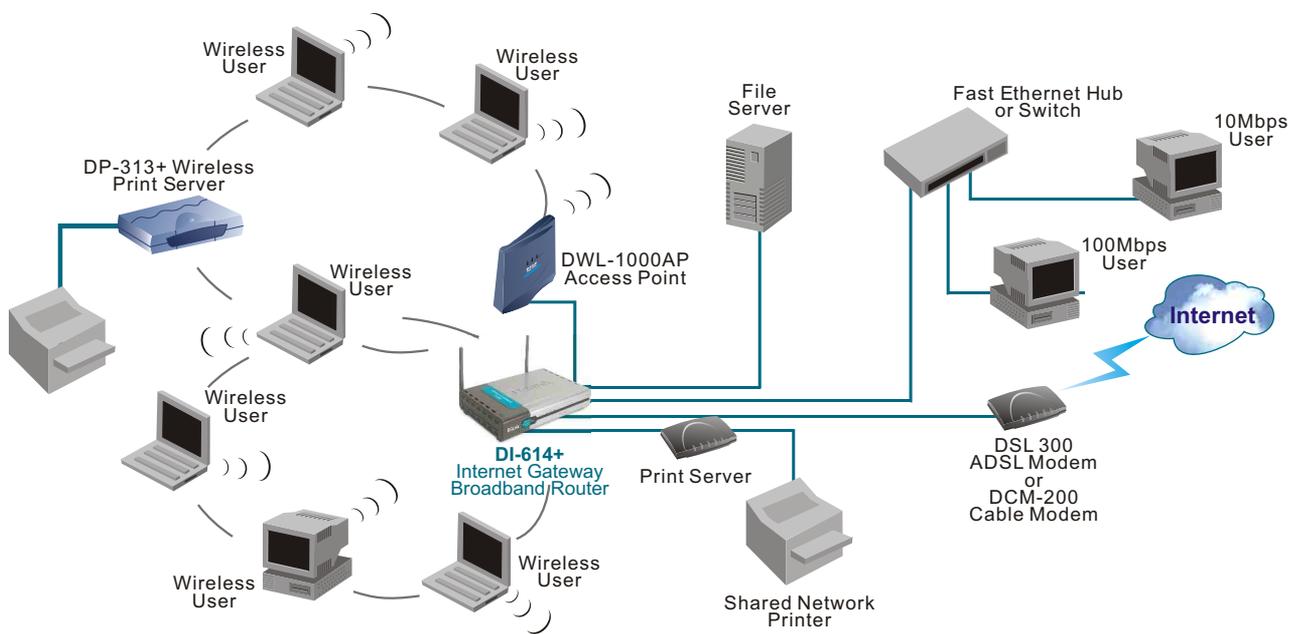

Internet Gateway Functions

The DI-614+ Internet Gateways lets wireless users logon to the Internet, share a network printer, access file servers, and communicate with wired Ethernet users.