



DGS-1004T

DGS-1004T desktop switch with 4 10/100/1000Mbps Gigabit ports

## Copper Gigabit Switch for SMB and SOHO

This desktop switch offers an economical way for the SOHO and small and medium business (SMB) to benefit from the increased bandwidth of Gigabit Ethernet. It provides 4 Gigabit ports for fast server deployment to meet increasing network load. With plug-and-play installation and copper Gigabit ports capable of connecting to your existing Cat. 5 twisted-pair cable, this device instantly enhances your workgroup's performance without requiring you to install expensive fiber cables or to go through complex re-configuration.

### 4 Copper Gigabit Ports

4 Gigabit ports provide an inexpensive alternative solution to fiber-optic. Using your existing low-cost Cat. 5 copper twisted-pair wires as the transmission media, these ports allow you to instantly upgrade your servers to Gigabit capability without requiring you to install new, expensive fiber cables. All ports support 10/100/1000Mbps network speed auto-sensing and full/half duplex auto-negotiation.

### Full-duplex Gigabit Server Access

The Gigabit ports provide dedicated bandwidths for your servers running at 2000Mbps full-duplex. This gives workstations bottleneck-free paths to simultaneously access server data.

### IEEE 802.3x Flow Control

This function support allows your servers to directly connect to the switch for fast, reliable data transfer. At 2000Mbps full duplex, the switch provides high-speed data pipes to your servers with minimum data transfer loss.

### Auto-negotiation of MDI/MDIX Cross Over

All ports support auto-negotiation of MDI/MDIX cross over. This eliminates the need for cross over cables or uplink ports. Any port can simply plug to a server, a hub or another switch using the usual straight-through twisted-pair cable.

### Seamless Integration

The switch integrates seamlessly with your existing network equipment, be it Ethernet, Fast Ethernet or Gigabit Ethernet, dispensing you of the need to replace any hardware or software.

### Plug-and-Play Installation

With 10/100/1000Mbps auto-sensing, auto-negotiation for every port, plus the ability to exist with your Cat. 5 wall wiring, network installation is a breeze. All you need to do is plug the cables to the switch, and your network is up and running in a matter of minutes.

## Features

- Inexpensive Gigabit solution for SOHO & SMB
- 4 10/100/1000Mbps Gigabit ports on Cat. 5 cable
- Auto MDI/MDIX cross over for all ports
- Secure store-and-forward switching scheme
- Full/half-duplex for Ethernet/Fast Ethernet speeds
- Blazing 2000Mbps full duplex for Gigabit speed
- IEEE 802.3x Flow Control
- Plug-and-play installation
- Easily installable on desktop
- Rack-mount kit for installation in 19-inch standard rack provided

# DGS-1004T

## Technical Specifications

## Copper Gigabit Switch

### General

#### Standards

- IEEE 802.3 10BASE-T Ethernet (twisted-pair copper)
- IEEE 802.3u 100BASE-TX Fast Ethernet (twisted-pair copper)
- IEEE 802.3ab 1000BASE-T Gigabit Ethernet (twisted-pair copper)
- ANSI/IEEE 802.3 NWay auto-negotiation
- IEEE 802.3x Flow Control

#### Protocol

CSMA/CD

#### Data Transfer Rates

- Ethernet:
  - 10Mbps (half duplex)
  - 20Mbps (full duplex)
- Fast Ethernet:
  - 100Mbps (half duplex)
  - 200Mbps (full duplex)
- Gigabit Ethernet:
  - 2000Mbps (full duplex)

#### Topology

Star

#### Network Cables

- 10BASE-T:
  - UTP Cat. 3, 4, 5 (100 m max.)
  - EIA/TIA-586 100-ohm STP (100 m max.)
- 100BASE-TX, 1000BASE-T:
  - UTP Cat. 5, Cat. 5e (100 m max.)
  - EIA/TIA-568 100-ohm STP (100 m max.)

#### Full/half Duplex

- Full/half duplex for 10/100Mbps speeds
- Full duplex for Gigabit speed

#### Media Interface Exchange

Auto MDI-II/MDI-X adjustment for all ports

#### Twisted-pair Rx Reverse Polarity

Auto-correction

#### LED Indicators

- Per port: 100Mbps speed, 1000Mbps speed, Link/Act
- Per device: Power

### Performance

#### Transmission Method

Store-and-forward

#### MAC Address Table

8K entries per device

#### MAC Address Learning

Automatic update

#### Packet Filtering/Forwarding Rates (half duplex)

- Ethernet: 14,880 pps per port
- Fast Ethernet: 148,810 pps per port
- Gigabit Ethernet: 1,488,100 pps per port

#### RAM Buffer

2.5Mbits per device

### Physical & Environmental

#### AC Input

100 - 240 VAC, 50/60 Hz  
Internal universal power supply

#### Power Consumption

8 watts (max.)

#### Ventilation

No DC fan required

#### Operating Temperature

0° - 40°C (31° - 104°F)

#### Storage Temperature

-10° - 70°C (14° - 158°F)

#### Humidity

5% - 95% non-condensing

#### Dimensions

280 x 180 x 44 mm (11 x 7 x 1.7 inches)  
Desktop size, 1 U height

#### Weight

1.6 kg (3.53 lb.)

#### Emission (EMI)

- FCC Class A
- CE Class A
- VCCI Class A


#### Safety

- CUL

## Ordering Information

### Copper Gigabit Switch

**DGS-1004T** 4 10/100/1000Mbps ports

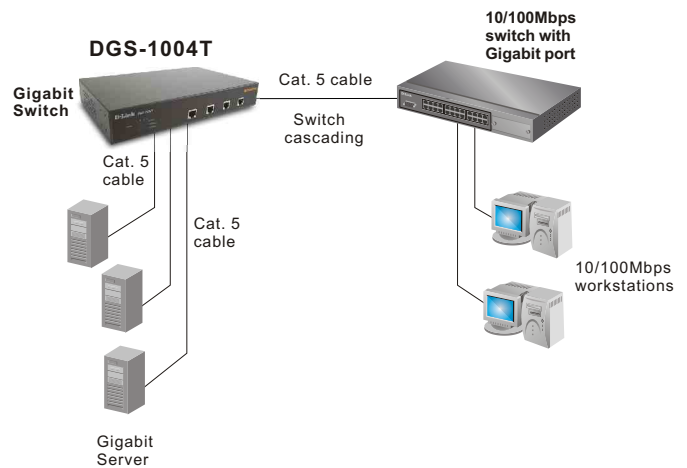

# D-Link®

Specifications subject to change without prior notice. D-Link is a registered trademark of D-Link Corporation/D-Link System Inc. All other trademarks belong to their proprietors.

<b>U.S.A.</b>	TEL: 1-949-788-0805	FAX: 1-949-753-7033	www.dlink.com
<b>Canada</b>	TEL: 1-905-8295033	FAX: 1-905-8295095	www.dlink.ca
<b>Europe</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
<b>U.K.</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	www.dlink.co.uk
<b>Germany</b>	TEL: 49-6196-77990	FAX: 49-6196-7799300	www.dlink.de
<b>France</b>	TEL: 33-1-30238688	FAX: 33-1-30238689	www.dlink-france.fr
<b>Benelux</b>	TEL: 31-40-2668713	FAX: 31-40-2668666	www.dlink-benelux.nl
<b>Italy</b>	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	www.dlink.it
<b>Iberia</b>	TEL: 34-93-4090770	FAX: 34-93-4910795	www.dlinkiberia.es
<b>Sweden</b>	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	www.dlink.se
<b>Norway</b>	TEL: 47-22-991890	FAX: 47-22-207039	www.dlink.no
<b>Denmark</b>	TEL: 45-43-969040	FAX: 45-43-424347	www.dlink.dk
<b>Finland</b>	TEL: 358-9-622-91660	FAX: 358-9-622-91661	www.dlink-fi.com
<b>Singapore</b>	TEL: 65-774-6233	FAX: 65-774-6322	www.dlink-intl.com
<b>Australia</b>	TEL: 61-2-94177100	FAX: 61-2-94171077	www.dlink.com.au
<b>Japan</b>	TEL: 81-3-5434-9678	FAX: 81-3-5434-9868	www.dlink.co.jp
<b>China</b>	TEL: 86-10-8809-7777	FAX: 86-10-8809-6789	www.dlink.cn
<b>India</b>	TEL: 91-22-652-6696	FAX: 91-22-652-8914	www.dlink-india.com
<b>Middle East</b>	TEL: 202-6356176	FAX: 202-6356192	www.dlink-me.com
<b>South America</b>	TEL: 56-2-232-3185	FAX: 56-2-232-0923	www.dlink.cl
<b>South Africa</b>	TEL: 27(0)126652165	FAX: 27(0)126652186	www.dlink.co.za
<b>Russia</b>	TEL: 7-095-737-3389	FAX: 7-095-737-3390	www.dlink.ru
<b>Taiwan</b>	TEL: 886-2-2910-2626	FAX: 886-2-2910-1515	www.dlinktw.com.tw
<b>D-Link Corp.</b>	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299	www.dlink.com.tw



RECYCLABLE  
Rev. 01 (June 2002)  
Printed in Taiwan