

DFB-H7



- Connect Your USB Digital Media Peripherals
- Four USB 2.0 Ports with Speeds up to 480Mbps
- Two IEEE 1394 FireWire Ports with Speeds up to 400Mbps
- Compact & Portable
- Plug & Play Installation



QuickMedia USB Solutions *USB 2.0/FireWire* **Combo Hub**

The D-Link DFB-H7 is a combination 6-port USB 2.0 and 1394 FireWire hub that brings together two popular high-speed technologies for an all-in-one, high-speed, high performance solution for digital media peripherals.

Connect all of your digital media peripherals with the DFB-H7. With four USB 2.0 ports for connecting all of your USB peripherals and two FireWire ports, you have plenty of available ports to connect your digital video camcorder, hard drive, digital camera, Web cam or other FireWire and USB devices. The DFB-H7 is compliant with both USB 2.0 and FireWire standards, and a total of up to 189 devices (127 USB devices and 63 FireWire) can be daisy-chained.

The DFB-H7 is a true plug and play solution requiring no extra drivers and supports both PCs and Macs and all the popular operating systems including Windows 98SE, Windows Me, Windows XP, Windows 2K, and Mac OS Jaguar™ 10.1 and above.

Compact and portable, the DFB-H7 can be integrated into any home or office environment connects immediately to your multimedia peripherals. Both a FireWire cable and a 6 ft. USB 2.0 cable are included with the DFB-H7 for connecting to a host computer or hub.

QuickMedia USB Solutions

USB 2.0/FireWire

Combo Hub



DFB-H7

TECHNICAL SPECIFICATIONS

Standards

USB 1.1
USB 2.0
IEEE 1394 FireWire

Ports

4 - USB 2.0 Type A Ports
2 - 1394 FireWire
Downstream Ports
1 - USB 2.0 Type B Port
1 - 1394 Firewire Upstream Port

LEDs

1 - Power LED
6 - Port LEDs

Cascade

USB: Up to 127 USB
Devices
FireWire: Up to 63
FireWire Devices

Power

Self-Powered

Data Transfer Rate

USB: 1.5/12/100/480 Mbps
FireWire: up to 400 Mbps

System Requirements

Available FireWire Port*
and USB Port
Windows 98SE/Me/2000/XP
Mac OS 10.1 and Above
64MB RAM

Dimensions

Length 4 in. (104 mm)
Width 2.5 in. (63 mm)
Height 1.1 in. (29 mm)
Weight .39kg (14 oz)

Certifications

FCC
CE

Operating Temp

32°F to 122°F (0°C to
50°C)

Storage Temp

-4°F to 140°F (-20°C to
60°C)

Operating Humidity


0% to 80% Non-
Condensing

Storage Humidity

0% to 80% Non-
Condensing

Warranty

1 year

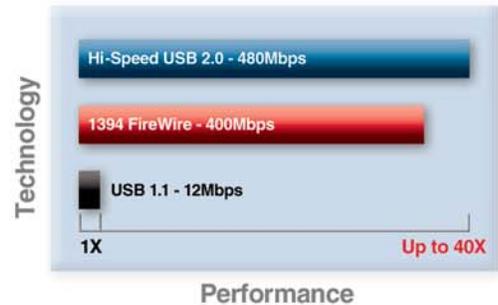

*One FireWire Port and one Type B USB Port must BOTH be connected to a host computer or hub for all DFB-H7 ports to operate properly.

USB 2.0 & IEEE 1394 Combo Connectivity



D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
©Copyright D-Link Systems, Inc. 2003. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.
Other trademarks or registered trademarks are the property of their respective manufacturers or owners.
Price and specifications are subject to changes without notice. See inside package for warranty details.
* 24/7 Tech Support is available only in USA.

D-Link®

Building Networks for People