

## 2-Port KVM Switch

### With Audio Support

- Mini KVM Switch for 2 PCs
- Supports PS/2 Keyboard/Mouse Connections
- Supports SVGA, VGA, Multi-Sync Monitors
- Share Speakers Between 2 PCs
- 2 Sets of KVM Cable Provided

#### FEATURES

- **2 KVM Ports**
- **PS/2 Keyboard/Mouse Support**
- **SVGA, VGA, Multi-Sync Monitor Support**
- **Audio Socket for Connection of an Audio Device**
- **Auto-Scans Connected PCs Every 10 Seconds**
- **Audible Feedback for Confirmation While Switching Between PCs**
- **Front Panel LED Indicator for Each Connected PC**
- **Can Switch Between PCs Using Push Button or Keyboard Hot Keys**
- **Up to 2048x1536 Video Resolution Support**
- **2 Sets of KVM Cable Provided**

#### MULTIMEDIA

**T**he KVM-121 2-port KVM (Keyboard, Video and Mouse) switch is a cost effective device for home and office users. It allows users to easily control two PCs from a single set of keyboard, mouse, and VGA monitor. It provides audio support and an audio socket, allowing the two connected PCs to share a set of speakers. The switch provides many easy-to-use features and is perfect for home and small office use.

*Cost-effective for PC Users.* If you have two PCs and need to use them at the same time, the KVM-121 saves the money and space by allowing you to control the two computers from a set of keyboard, monitor and mouse. Or, you may have a better, bigger monitor and want to connect both PCs to it. The KVM-121 allows you to do this. Two sets of cables are attached to the KVM switch for ready for use, dispensing users of the need to prepare separate cables and connect them to the switch.

*Versatile Functions.* The KVM-121 utilizes advanced microprocessor emulation to intelligently manage each KVM port. This allows simultaneous boot-up of the connected PCs. Auto scan, audible feedback, and keyboard "Hot Keys" make the DKVM-2KU simple to use and manage. There is also a control button located on the front panel that allows users to switch between the PCs.

*Status Save and High Resolution Support.* The KVM-121 supports VGA, SVGA and Multi-Sync monitors at up to 2048 x 1536 resolution at 72Hz refresh rate. Support for Microsoft IntelliMouse is provided.

*Share Audio Device.* The KVM-121 provides audio support and an audio socket, allowing users to plug in an audio device such as a set of speakers for sharing between the two connected PCs.



## Technical Specifications

### Connection to Console

- Mini DIN 6-pin female keyboard connector
- Mini DIN 6-pin female mouse connector
- HD 15-pin female monitor connector
- 3.5-mm audio socket

### Connection to KVM Cables

- 2 HDDB 15-pin female connectors
- 2 3.5-mm audio sockets

### KVM Cables

2 sets of 1.8-m (6-ft) KVM cables provided for connection to computers, each with the following connectors:

- HDDB 15-pin female connector
- Mini DIN 6-pin male keyboard plug
- Mini DIN 6-pin male mouse plug
- HD 15-pin male monitor plug
- 3.5-mm audio plug

### Diagnostic LEDs



2 port LEDs for 2 connected Purchase

### PC Selection

- Using Push button
- Using keyboard hot keys to:
  - Switch between PC with or without synchronous audio signals
  - Enable/disable key beep
  - Reset mouse/keyboard
  - Auto-scan mode or without auto-scan mode (Auto-scan between computers every 10 seconds)

### O.S. Support

- Windows 98, ME, NT, 2000, 2003, XP
- Linux

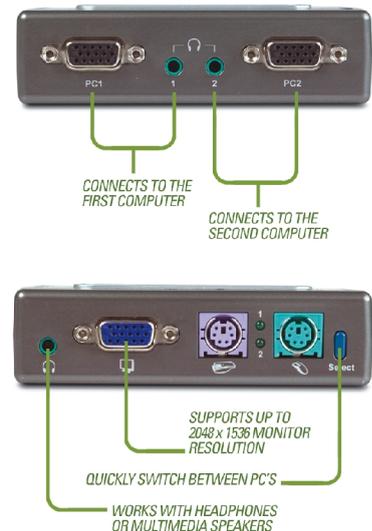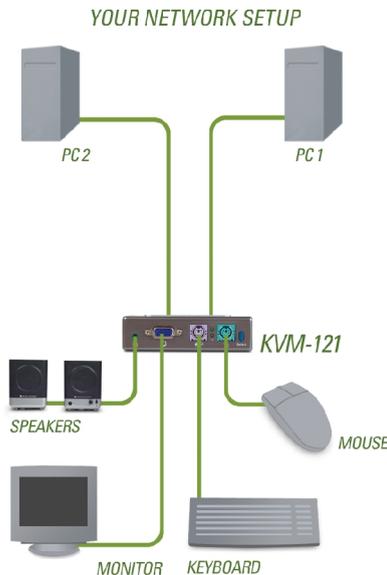

## Physical & Environmental

### Power Input

From PC's PS2 ports, no external power adapter required

### Power Consumption

5V 70mA

### Dimensions

104 x 61 x 28 mm (KVM switch only)

### Weight

565 grams (KVM switch & 2 sets of KVM cables)

### Operating Temperature

0° to 40°C

### Storage Temperature

-20° to 60 °C

### Operating Humidity

0% to 80% non-condensing

### Emission (EMI)

- FCC Class B
- CE
- C-Tick



## D-Link Worldwide Offices

<b>U.S.A.</b>	TEL: 1-800-326-1688	FAX: 1-866-743-4905	<b>Luxemburg</b>	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
<b>Canada</b>	TEL: 1-905-8295033	FAX: 1-905-8295223	<b>Poland</b>	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
<b>Europe (U. K.)</b>	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	<b>Hungary</b>	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
<b>Germany</b>	TEL: 49-6196-77990	FAX: 49-6196-7799300	<b>Singapore</b>	TEL: 65-6774-6233	FAX: 65-6774-6322
<b>France</b>	TEL: 33-1-30238688	FAX: 33-1-30238689	<b>Australia</b>	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
<b>Netherlands</b>	TEL: 31-10-282-1445	FAX: 31-10-282-1331	<b>India</b>	TEL: 91-022-26526696	FAX: 91-022-26528914
<b>Belgium</b>	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	<b>Middle East (Dubai)</b>	TEL: 971-4-3916480	FAX: 971-4-3908881
<b>Italy</b>	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	<b>Turkey</b>	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
<b>Sweden</b>	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	<b>Egypt</b>	TEL: 202-414-4295	FAX: 202-415-6704
<b>Denmark</b>	TEL: 45-43-969040	FAX: 45-43-424347	<b>Israel</b>	TEL: 972-9-9715700	FAX: 972-9-9715601
<b>Norway</b>	TEL: 47-99-300-100	FAX: 47-22-309580	<b>LatinAmerica</b>	TEL: 56-2-232-3185	FAX: 56-2-232-0923
<b>Finland</b>	TEL: 358-9-2707 5080	FAX: 358-9-2707-5081	<b>Brazil</b>	TEL: 55-11-218-59300	FAX: 55-11-218-59322
<b>Spain</b>	TEL: 34-93-4090770	FAX: 34-93-4910795	<b>South Africa</b>	TEL: 27-12-665-2165	FAX: 27-12-665-2186
<b>Portugal</b>	TEL: 351-21-8688493		<b>Russia</b>	TEL: 7-495-744-0099	FAX: 7-495-744-0099 #350
<b>Czech Republic</b>	TEL: 420-(603)-276-589		<b>Japan</b>	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
<b>Switzerland</b>	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	<b>China</b>	TEL: 86-10-58635800	FAX: 86-10-58635799
<b>Greece</b>	TEL: 30-210-9914 512	FAX: 30-210-9916902	<b>Taiwan</b>	TEL: 886-2-6600-0123	FAX: 886-2-6600-8168
			<b>Headquarters</b>	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898