



# Install Guide

Version 1.0

DNS-G120

## Wireless Network Storage Adapter

# System Requirements

- Computer with Windows XP or 2000 with an installed Ethernet Adapter\*
- Internet Explorer 6.0 or Netscape Navigator 7.0 and above
- An 802.11g/b wireless network
- USB Hard Drive

\* It is required that an Ethernet cable is used during initial setup. Once your wireless configuration is set, you may disconnect the Ethernet cable and reboot the DNS-G120 to connect to your wireless network.

# Package Contents



D-Link DNS-G120  
Wireless Storage Adapter



Manual and Software  
on CD




Ethernet Cable




5V 2.5A Power Supply

# Front Panel

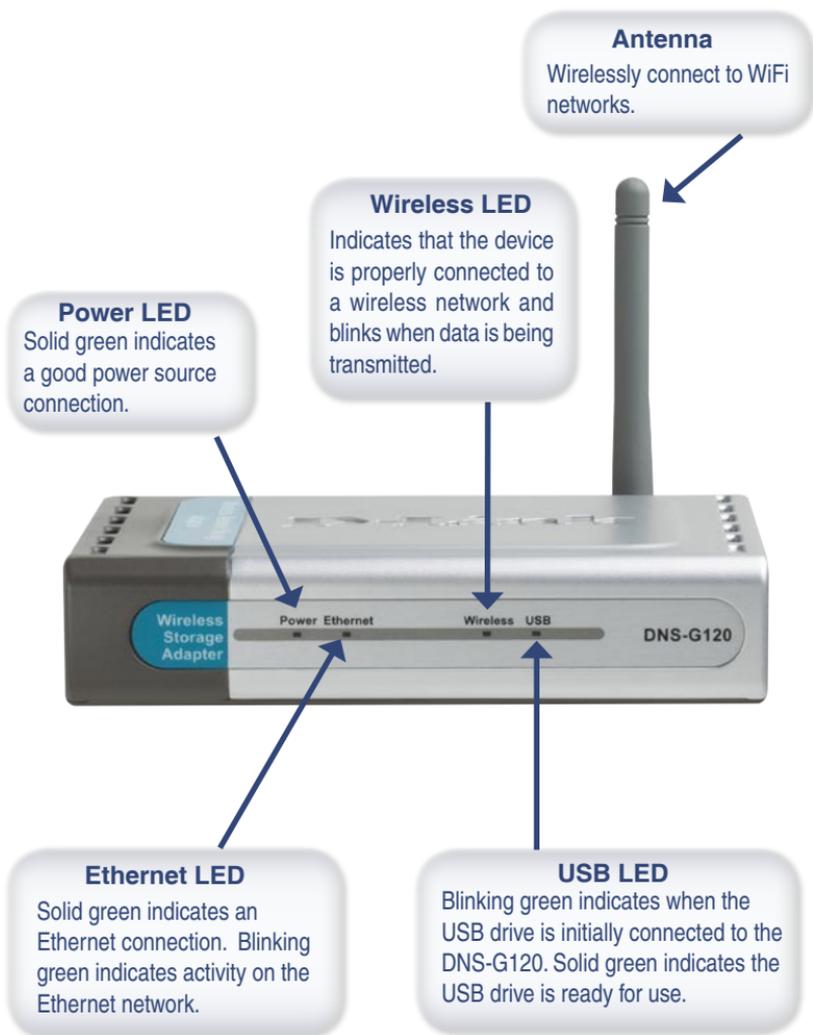

# Rear Panel

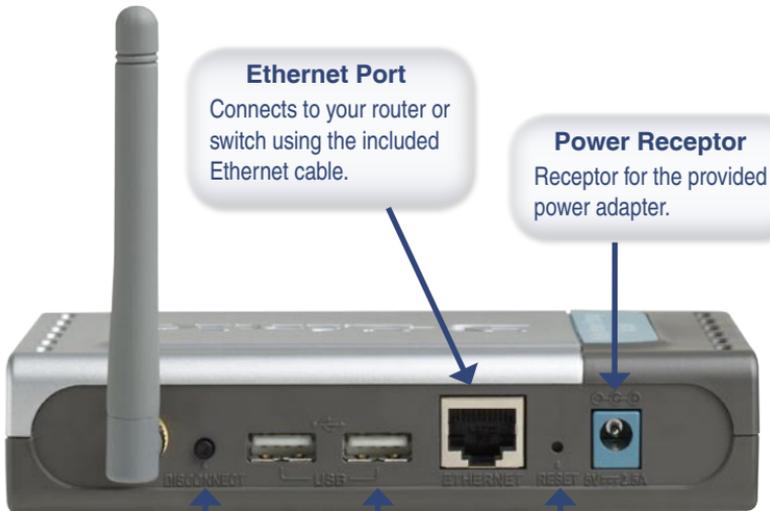**Ethernet Port**

Connects to your router or switch using the included Ethernet cable.

**Power Receptor**

Receptor for the provided power adapter.

**Disconnect Button**

Press this button to safely disconnect USB drives from the DNS-G120.

**USB Ports**


Connects your USB 1.1 or 2.0 drives to the DNS-G120.

**Reset Button**

This button will restore the factory default settings.

# Installation Overview

Once you've completed your DNS-G120 installation, your network may appear similar to the diagram below.

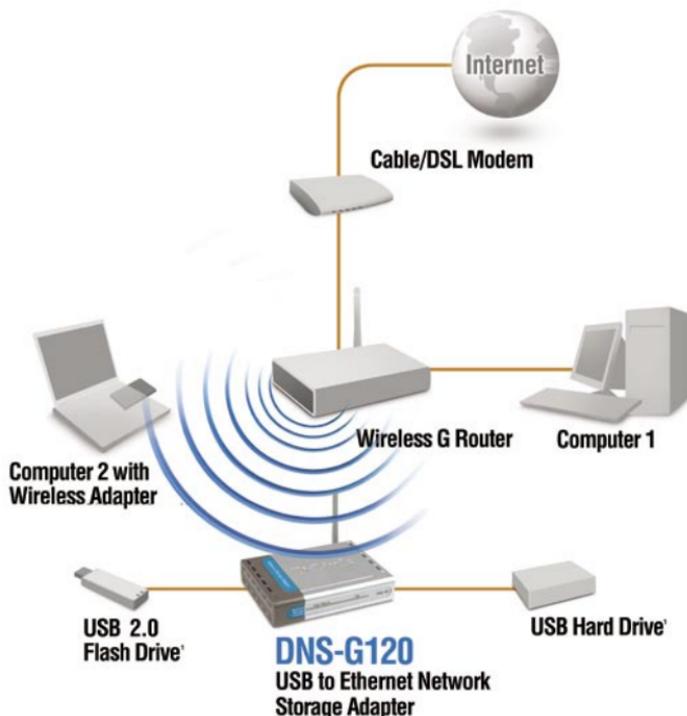

# Installing the Hardware

It is required that an Ethernet cable is used during initial setup. Once your wireless configuration is set, you may disconnect the Ethernet cable and reboot the DNS-G120 to connect to your wireless network.

- 1** Attach the provided Ethernet cable to the Ethernet port on the rear panel.



- 2** Attach the other end of the Ethernet cable to an available Ethernet port on your router or switch.

- 3** Plug the AC adapter into the receptor located on the back of the DNS-G120. Plug the other end of the AC Adapter into a power strip or wall outlet.



- 4** Attach your USB drive(s) to the USB port(s) located on the rear panel of the DNS-G120. The USB LED on the front panel will blink until the drive has been installed. Once the USB LED is solid green, your USB drive is ready for use.




# Windows® Connect Now (WCN)

**Note: This feature is only available through Windows XP with Service Pack 2 installed.**

In this section, you will learn how to use the Wireless Network Setup Wizard to easily and securely set up the DNS-G120 on a wireless network. You will need to have a USB flash drive available to complete the WCN wireless setup on the DNS-G120.

If you do not have Windows XP with Service Pack 2 or do not wish to use WCN, skip to page 11.

Click Start > Accessories > Communications > Wireless Network Setup Wizard.

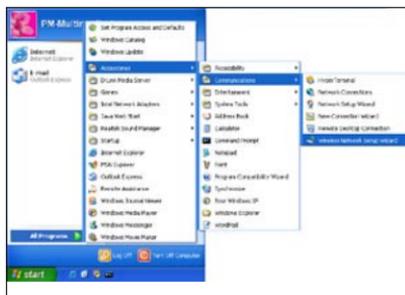


Click **Next**.

## Windows® Connect Now (Continued)

If you have already used WCN to configure other wireless devices on your network and would like to use the same settings on your DNS-G120, click **Add new computers or devices to the 'Wireless Network' network** and skip to the last step on page 9.

To create new wireless settings, click **Setup a new wireless network**.

Click **Next**.

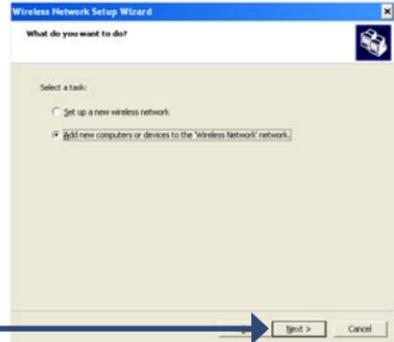


Enter the Network Name (SSID).

If you want Windows to assign a random network key (encryption key), select **Automatically assign a network key**.

If you want to manually assign a network key, select **Manually assign a network key**.

To use WPA-PSK, select **Use WPA Encryption instead of WEP**.

Click **Next**.

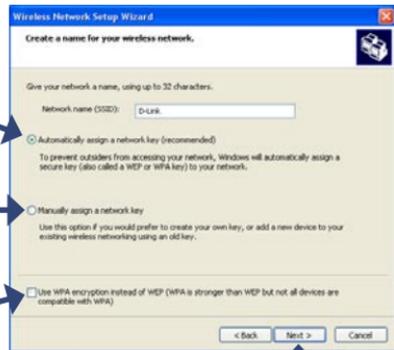

# Windows® Connect Now (Continued)

This screen appears if you choose to set the WEP key manually. Enter the desired encryption key in the space provided and then enter the key again to confirm.

Click **Next**.



This screen appears if you choose to set the WPA key manually. Enter the desired encryption key in the space provided and then enter the key again to confirm.

Click **Next**.



This screen appears when the WEP or WPA key has been assigned. Follow the directions on the screen to transfer settings to the USB flash drive.

Click **Next**.




## Windows® Connect Now (Continued)

This screen appears after the settings are successfully transferred to the USB flash drive. Follow the directions on the screen.

When inserting the USB flash drive into the USB port on the DNS-G120, the USB LED will blink slowly as it detects the USB flash drive and then turn off. The USB LED will then quickly blink 3 times when the transfer is complete, otherwise wait 30 seconds. The USB LED will then quickly blink 3 times and turn off again. Once the USB light is solid and the WLAN LED blinks, you may unplug the USB flash drive.

Click **Next**.

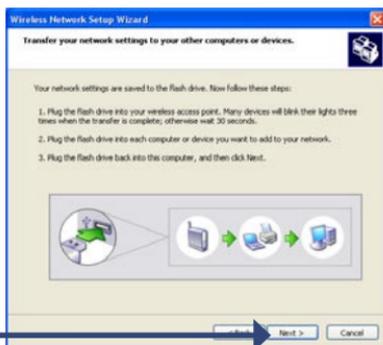

When the DNS-G120 wireless setup is successful, a window similar to this one will appear.

You have completed the wireless configuration of the DNS-G120.

Click **Finish**.



**Your wireless setup using WCN is now complete.**


# Configuration

To access the web-based configuration, insert the DNS-G120 CD into your CD-ROM drive.

Click **Launch D-Link Easy Search Utility**.



Highlight an available DNS-G120 and click **Configuration** to access the web-based utility.

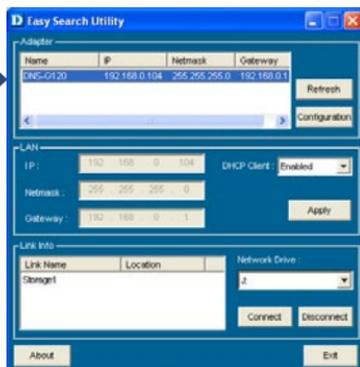


Type **admin** for the user name and leave the password field blank.

Click **Config**



# Configuration (continued)

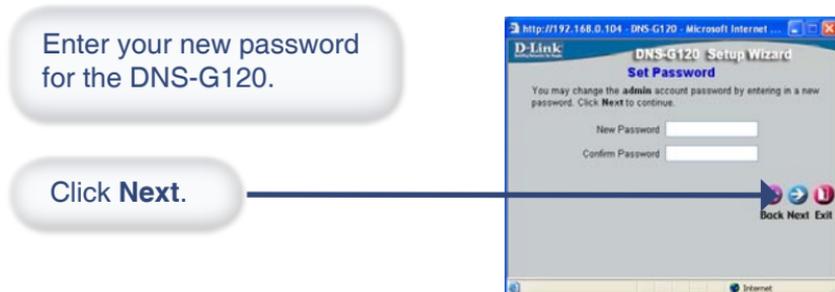

# Configuration (continued)

Select your Time Zone.


Click **Next**.

Leave **DHCP Client** enabled if your network contains a DHCP server. If not, select **Static IP** and enter the IP address information to be used. The IP address must be in the same range as your network.

Click **Next**.

Enter the workgroup name of your network. Enter a name and a description for the DNS-G120.

Click **Next**.

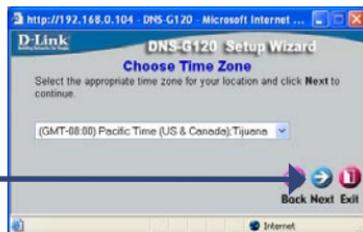

## Configuration (continued)

If you have configured the wireless settings using Windows® Connect Now (WCN), click Next on the following screen without any configuration changes. Refer to page 7 for WCN setup instructions.

By default, the wireless function is disabled. To connect to a wireless network, select **Enable** and click **Site Survey** or manually enter your wireless settings.

Click **Next**.




Click **Restart**.



Your setup is complete. Please close all web browser windows. Use the Easy Search Utility to locate and continue advanced configuration of the DNS-G120.

# Viewing Files and Folders

To view the content on your USB drive, double-click on the **My Network Places** icon on your desktop and double-click on the folder that represents your USB drive.

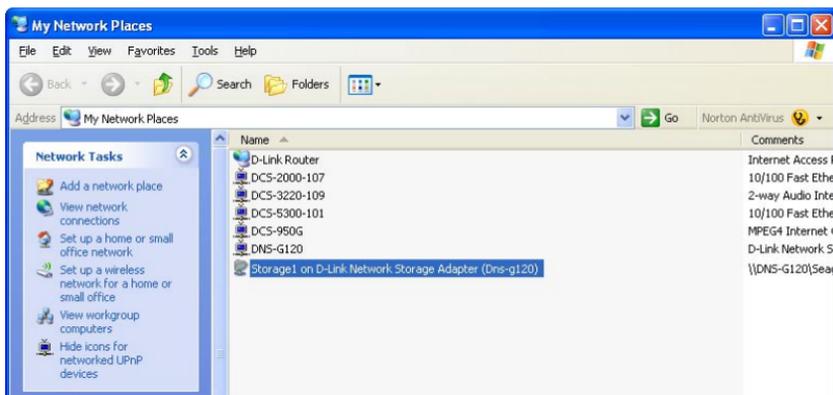

By default, all users on your network will have read/write permissions to all folders and files on the USB drive(s).


For more information on creating users and assigning permissions, please refer to the **Using the Configuration Utility** section in the manual included on your DNS-G120 CD.

# Using the Easy Search Utility

Click **Launch D-Link Easy Search Utility**.



Highlight an available DNS-G120 and click **Configuration** to access the web-based utility.

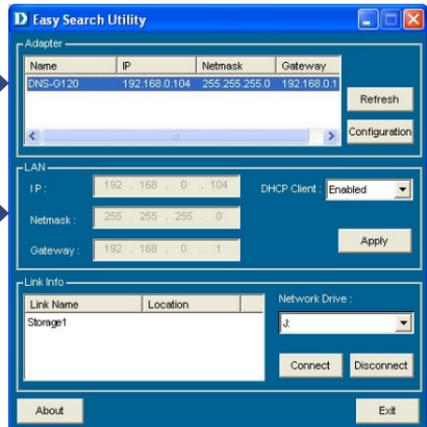

To assign a static IP address, highlight the DNS-G120 and select **Disabled** from the **DHCP Client** drop-down menu. Click **Apply** to save the new IP settings.

# Mapping Drives


You can assign a drive letter (e.g. E:) to a specific folder on your USB drive(s) that are connected to your DNS-G120.

Insert the D-Link DNS-G120 CD into your CD drive.

Click **Launch D-Link Easy Search Utility**.



Highlight an available DNS-G120.

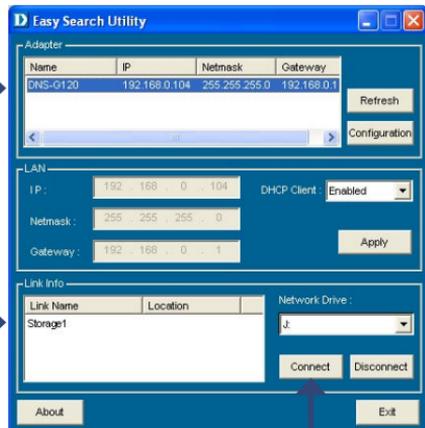

Available shares will be displayed. Highlight the share you want to map.

Select an available drive letter from the drop-down menu and click **Connect**.



# Notes

# Technical Support

D-Link's website contains the latest user documentation and software updates for D-Link products.

D-Link provides free technical support for customers within the United States and Canada for the duration of the product's warranty period.

U.S. and Canadian customers can contact D-Link Technical Support through our website or by phone.

## United States

### Telephone

(877) 453-5465

Twenty four hours a day, seven days a week.

### World Wide Web

<http://support.dlink.com>

### E-mail

[support@dlink.com](mailto:support@dlink.com)

## Canada

### Telephone

(800) 361-5265

Monday through Friday, 7:30am to 12:00am EST.

### World Wide Web

<http://support.dlink.ca>

### E-mail

[support@dlink.ca](mailto:support@dlink.ca)



Version 1.0  
Revised 05/24/05

Copyright ©2005 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link, the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks are the property of their respective owners. All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein. Visit [www.dlink.com](http://www.dlink.com) for more details.