

Точка доступа DAP-1150/Ru.

Версии прошивки 2.00 – 2.11

Настройка DAP-1150/Ru в режиме повторителя (Repeater mode)


Подключите устройство к компьютеру кабелем, поставляющимся в комплекте. На сетевой карте, к которой подключено устройство, в настройках TCP/IP укажите IP-адрес - **192.168.0.51** и маску подсети - **255.255.255.0**. Откройте Internet Explorer и наберите в строке адреса: **dlinkap** или **192.168.0.50**.

Подключение по беспроводной связи к устройству или попытка открытия настроек через любой другой Интернет-браузер не всегда могут быть успешными.

Login: admin

Password: (по умолчанию пароль отсутствует)

Зайдите на вкладку Setup (строка вкладок сверху) в раздел Wireless Setup (список слева).

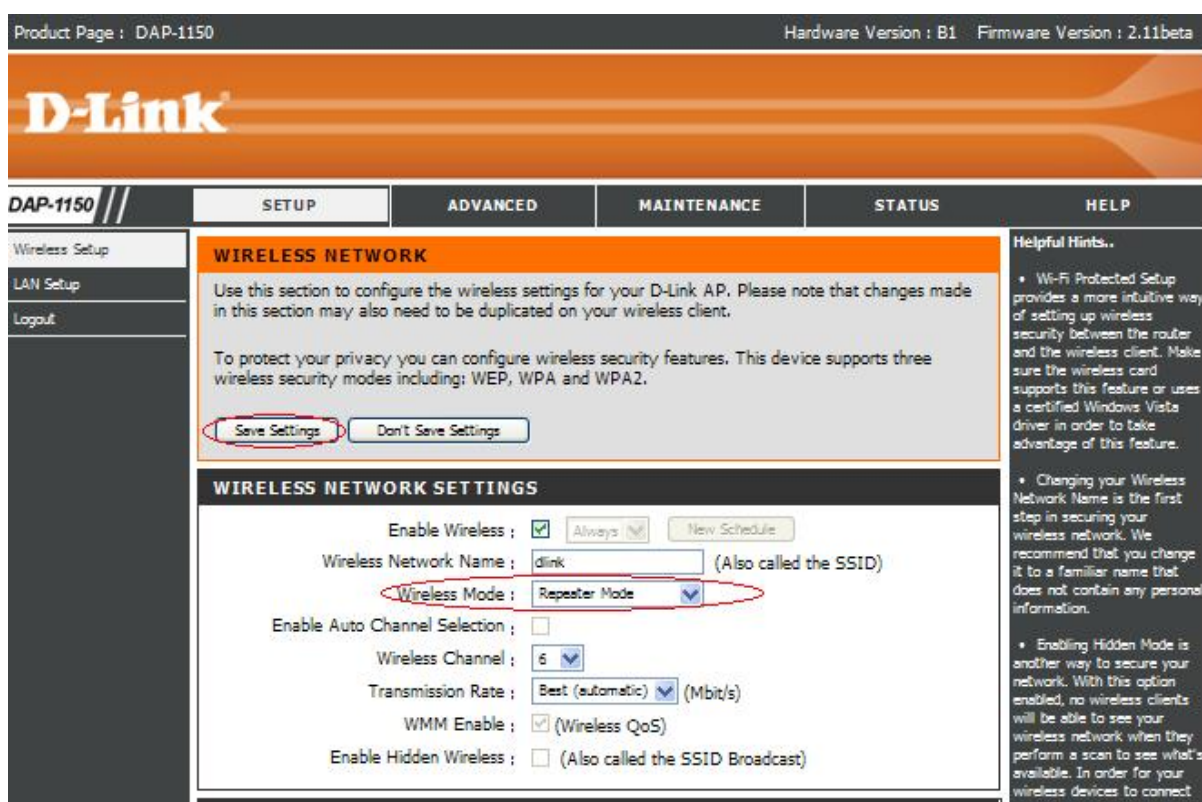

Product Page : DAP-1150 Hardware Version : B1 Firmware Version : 2.11beta

D-Link

DAP-1150 // SETUP ADVANCED MAINTENANCE STATUS HELP

Wireless Setup
LAN Setup
Logout

WIRELESS NETWORK

Use this section to configure the wireless settings for your D-Link AP. Please note that changes made in this section may also need to be duplicated on your wireless client.

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.

Save Settings Don't Save Settings

WIRELESS NETWORK SETTINGS

Enable Wireless : Always New Schedule

Wireless Network Name : dlink (Also called the SSID)

Wireless Mode : Repeater Mode

Enable Auto Channel Selection :

Wireless Channel : 6

Transmission Rate : Best (automatic) (Mbit/s)

WMM Enable : (Wireless QoS)

Enable Hidden Wireless : (Also called the SSID Broadcast)

Helpful Hints..

- Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature.
- Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.
- Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your network, you will need

1. Установите в поле “Wireless Mode” значение “Repeater Mode” (если было установлено другое значение, нажмите после выбора “AP Mode” кнопку “Save Settings”, дождитесь готовности устройства)

Save Settings
Don't Save Settings

WIRELESS NETWORK SETTINGS

Enable Wireless : Always New Schedule
 Wireless Network Name : (Also called the SSID)
 Wireless Mode : Repeater Mode
 Enable Auto Channel Selection :
 Wireless Channel : 6
 Transmission Rate : Best (automatic) (Mbit/s)
 WMM Enable : (Wireless QoS)
 Enable Hidden Wireless : (Also called the SSID Broadcast)

SITE SURVEY

SCAN

CH	Signal	BSSID	Security	SSID	
<input type="radio"/>	1	70%	00:1B:11:30:2C:62	WPA2-PSK	Develop
<input type="radio"/>	6	100%	1C:AF:F7:CF:73:2B	WEP	DIR-632
<input type="radio"/>	6	60%	1C:BD:B9:7C:23:C6	OPEN	DSL-2640U
<input type="radio"/>	6	81%	52:08:04:EB:7F:FF	OPEN	dlink_guestFON2
<input type="radio"/>	6	81%	34:08:04:EB:7F:FE	OPEN	DSL-2740UFON2
<input type="radio"/>	6	39%	00:18:E7:CA:9F:C0	OPEN	dlink
<input checked="" type="radio"/>	6	15%	5C:D9:98:63:F5:04	WPA2-PSK	Home
<input type="radio"/>	11	0%	00:90:4C:D0:54:76	WPA2-PSK	MTS-ROUTER
<input type="radio"/>	11	50%	34:08:04:EB:5A:45	WPA2-PSK	Domolink_test
<input type="radio"/>	11	81%	00:0C:44:77:52:88	WEP	DIR-300NRU
<input type="radio"/>	13	91%	00:22:B0:B5:B6:D8	WPA2-AUTO-PSK	Test N

WIRELESS SECURITY MODE

Security Mode : Enable WPA/WPA2 Wireless Security (enhanced)

WPA/WPA2

WPA/WPA2 requires stations to use high grade encryption and authentication.

Cipher Type : AES
 PSK / EAP : PSK
 Network Key : (8~63 ASCII or 64 HEX)

Save Settings
Don't Save Settings

driver in order to take advantage of this feature.

- Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.

- Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.

- If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.

[More...](#)

2. Настройте предварительно параметры безопасности сети: выберите необходимый тип безопасности и задайте пароль.
3. Нажмите кнопку "SCAN" в разделе "Site survey" для обнаружения доступных сетей.
4. Выберите необходимую сеть из списка.
5. Сохраните настройки (кнопка "Save Settings"), дождитесь готовности устройства.