


### 3.1.2 Connecting the cables

The connection sockets at the rear of your D-Link DSL-302G modem look like this:

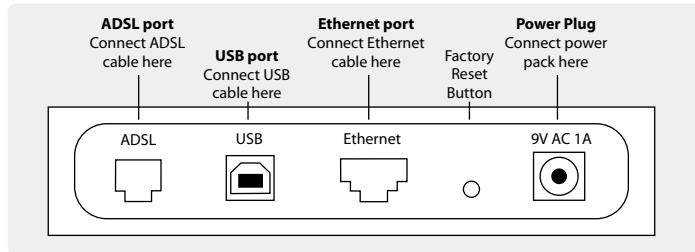

#### To connect your modem

The D-Link 302G ADSL modem can use either USB or Ethernet to connect to your computer.

- If you are connecting via USB you will need to run the self-installation CD to install the USB driver before you connect your modem. The D-Link DSL-302G ADSL modem supplied by OptusNet has been customised for the OptusNet service. Only the USB driver supplied on the self-installation CD will work with the OptusNet service.
- If you connecting via Ethernet it is possible to manually configure your modem without the self-installation CD. Only a web browser is required.

Next, you will need to:

- Connect either the USB or Ethernet cable between your PC to the respective port on your modem. Do not connect using both methods as this may cause problems.
- Connect the telephone cord between the ADSL port on the modem and the telephone wall socket. (You will need a double adaptor if you also use this wall socket for your telephone.)
- Plug the power pack cable into the modem power socket labelled "9V AC 1A" and plug the power pack into a power point.

### 3.1.3 Starting your modem


- Connect power to the modem.
- The Power LED will light up green. (See Quick Diagnostics – section 5)
- The ADSL LED will blink during initialisation and then remain steady green once an ADSL connection has been established.

If your modem is unable to establish a DSL connection:

- Check that your modem is powered on and the Power LED is steady green.
- Ensure all cables are connected correctly
- Consult the Help guide on your CD
- Contact OptusNet DSL customer support

Select **Change Password** from the left hand menu

The following page will appear:

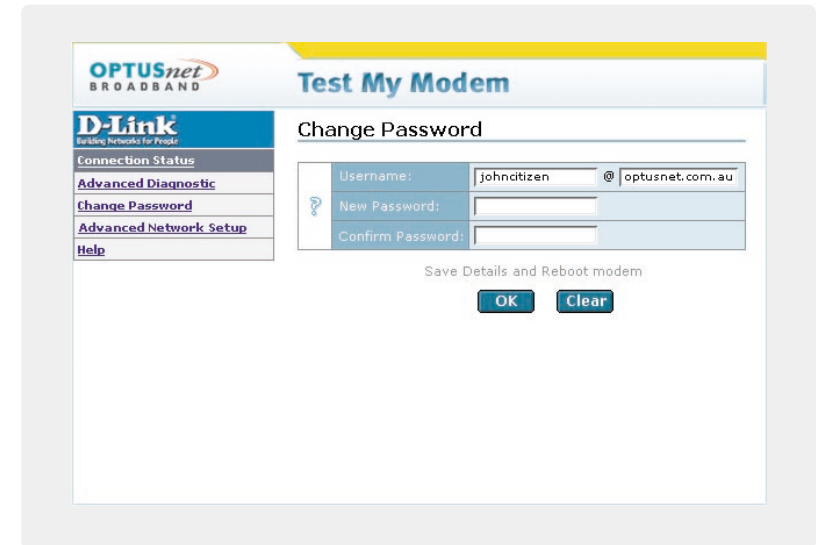

Replace the default username (johncitizen) with the username provided for you by OptusNet.

Replace the default password with the password provided by OptusNet in both the **New Password** and **Confirm Password** fields.

**Note:** You will find your OptusNet username and password on the letter you received with your self-installation kit.

Save these details by clicking the **OK** button.

An alert will appear recommending you use the Desktop Service Centre to change passwords. Click **OK** to continue.

Once the modem has rebooted and the ADSL connection has been successfully established the **ADSL:Link/Act** LED indicator will light steady green, followed by the **Status** LED.

Your modem is now connected to the OptusNet DSL service.