

D-Link

Quick Installation Guide

This product can be used with:
Windows XP, 2000, Me, 98se & 98
Macintosh OS v 8 & 9



DFE-690TXD
32-bit Cardbus Fast
Ethernet Adapter

Before You Begin

You must have at least the following:

- Windows XP/2000/Me/98se/98 or Macintosh OS v 8/9 with Cardbus Support
- One Available Cardbus Slot
- CD-ROM Drive

Check Your Package Contents

These are the items included with your purchase:



- **DFE-690TXD 32-Bit Cardbus Fast Ethernet Adapter**



- **CD-ROM (containing Drivers, PDF Installation Guide, PDF Manual and Warranty)**

If any of the above items are missing, please contact your reseller.



For Windows XP/2000/Me/98: Run the Install CD BEFORE installing the DFE-690TXD into your laptop.

Macintosh users: Proceed to Section 2: Pre-Installing the Macintosh OS 8/9 Driver

1

Pre-Installing the Windows XP, 2000, Me and 98se/98 Driver

**Macintosh users: Proceed to Section 2:
Pre-Installing the Macintosh OS 8/9 Driver**

With your computer ON, insert the Driver CD of the DFE-690TXD into your CD-ROM Drive.

Click **Install Drivers**



Click **OK**



Shut-Down your Computer

Note: Select "**No**", if you are prompted to restart your computer.
Shut-down the computer manually if the prompt does not occur.
(Go to **Start** > **Shut down** > **Shut-down**.)

Windows Users

Proceed to Section 3: Installing the DFE-690TXD into your Computer

Macintosh Users


Proceed to Section 2: Pre-Installing the Macintosh OS 8/9 Driver.

2



Pre-Installing the Macintosh OS 8/9 Driver

Insert the Driver CD into your CD-ROM drive.


Double-click **Macintosh**

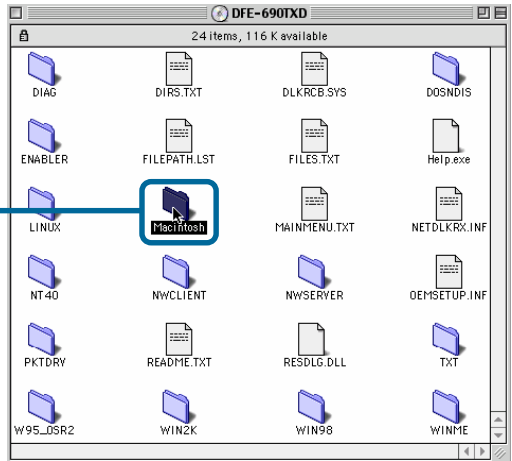


Drag & Drop to the Desktop and then **Double-click** it.

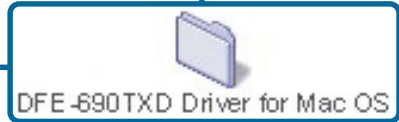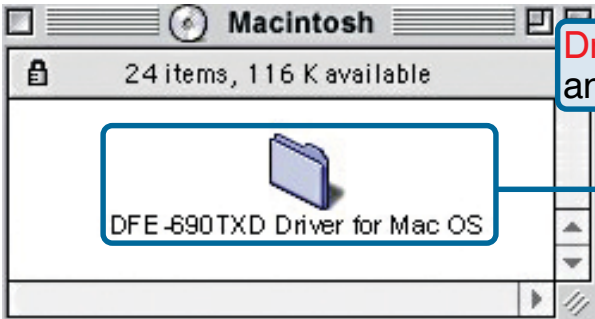


Double-click **Installer**

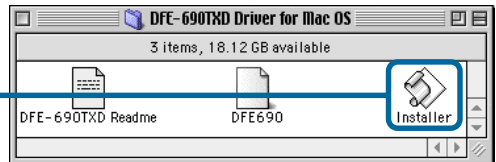

Click **Install**

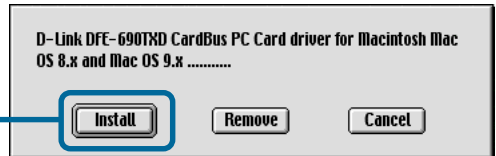

Click **OK**

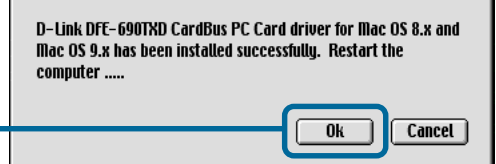

Proceed to Section 3.

3

Installing the DFE-690TXD into your Computer

This section refers to all users, regardless of which operating system you use.



You must first install the drivers as explained in Section 1 (for Windows users), or Section 2 (for Macintosh users). If you have not done this and you have inserted the DFE-690TXD into the Cardbus slot, you will need to cancel the New Hardware Wizard (for Windows users), and start over at the beginning of this installation guide (for Windows or Macintosh).

Make sure that your computer is turned **Off**.

Insert the DFE-690TXD into the Cardbus slot of your laptop



- Connect an Ethernet Cable (CAT5) from a switch or hub to the DFE-690TXD.

Turn your computer **On**.

Windows Users

Proceed to Section 4: Finishing the Windows Installation.

Macintosh Users

Restart your computer. Your installation is now complete.

Proceed to Appendix 2 to configure your adapter to automatically receive an IP address from your DHCP server.

4

Finishing the Windows Installation

To complete the installation of the DFE-690TXD:

- Make sure that the DFE-690TXD CD-ROM is inserted in the CD-ROM drive
- The DFE-690TXD is inserted into your laptop
- The laptop is turned ON
- See the section below that corresponds to your Operating System to complete the installation:

Windows XP

Windows XP completes the installation of the DFE-690TXD automatically. A "Found New Hardware" message will appear in the task bar to indicate that the installation is complete.




Windows 2000

Windows 2000 completes the installation of the DFE-690TXD automatically. When the "hour glass" disappears, the installation is complete.

Windows Me & 98se/98

- Windows Me & 98/98se installs the drivers automatically.
- If a "Version Conflict" screen appears, select "Yes" to use the newer file and continue.
- A screen will appear asking you to restart your computer. Select "Yes" to restart your computer and complete the installation.

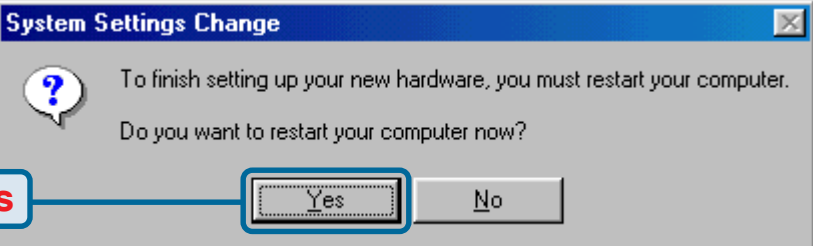

Click **Yes**

Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

Tech Support for customers within the United States:

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

email:support@dlink.com

Tech Support for customers within Canada:

D-Link Technical Support over the Telephone:

(800) 361-5265

Monday to Friday 8:30am to 9:00pm EST

D-Link Technical Support over the Internet:

<http://support.dlink.ca>

email:support@dlink.ca

