


## 4.2 Configure your modem

To configure your modem settings you must now access the configuration manager using your web browser. This is done by entering the IP address in the address bar of the browser window as follows:

- If you have connected your modem via **Ethernet**, enter `http://10.1.1.1` (Default Ethernet IP address of the D-Link DSL-302G) to access the modem configuration software.
- If you have connected your modem via **USB**, enter `http://10.1.1.2` (Default USB IP address of the D-Link DSL-302G) to access the modem configuration software.

You may wish to add this page to your **Favorites** for easy access later.

The following modem **Connection Status** screen will appear.

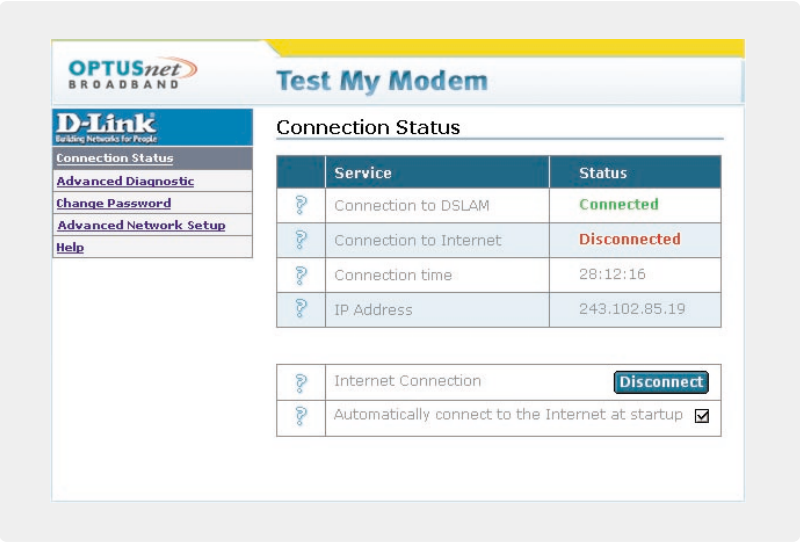

## 4.0 Manual modem configuration

The OptusNet self-installation CD configures all the necessary settings for your OptusNet DSL service. You do not need to manually configure your modem if you have run the self-installation CD. While the following information is provided for your reference, using the self-installation CD is the recommended method for configuring your modem.

The D-Link DSL-302G ADSL modem can use either **USB** or **Ethernet** to connect to your computer.

- If you are connecting via **USB** you will need to run the self-installation CD to install the USB driver before you connect your modem. The D-Link DSL-302G ADSL modem supplied by OptusNet has been customised for the OptusNet service. Only the USB driver supplied on the self-installation CD will work with the OptusNet service.
- If you connecting via **Ethernet** it is possible to manually configure your modem without the self-installation CD. Only a web browser is required.

After connecting your modem (see section 3) there are two key steps to manually configure your modem for the OptusNet DSL service:

- **PC settings** – Configure your computer's Ethernet network interface. Instructions are provided for each of the supported Windows operating systems.
- **Configure your modem** – Set the password in your modem's configuration pages.