

Wireless G Network Storage Enclosure

Add Hard Drive to Wireless Network

- Open Bay for 3.5-Inch Hard Drive
- 2 USB Ports for Attachment of Additional Hard Drives or Flash Drives
- Gigabit Port For Ethernet Network Connection
- Built-in 802.11g WLAN for Wireless User Access
- Wireless Access Point Functionality

FEATURES

Hardware Configurations

- 3.5-Inch Internal Hard Drive Installable in Open Bay
- Additional External Hard Drives/Flash Drives Attachable to 2 USB 2.0 Ports

Network Connection

- 1000BASE-T Gigabit Port for Connection to Ethernet Network or Router
- Built-in 802.11g Wireless LAN Functions as Access Point
- WPA & WPA-PSK Wireless Security

Applications

- Good for Recording of Live Surveillance Footage From Network Security Cameras
- Automatic (Scheduled) Downloads From Web or FTP Sites

Drive Access/Management

- User Account Creation & User-Definable Folder Permissions
- Built-in FTP Server for Remote File Access
- Scheduled Full or Incremental Backups
- Automatic Email Notifications

Installation/Setup

- Web-Based Configuration/Management
- UPnP AV Compliant for Compatibility With Other Media Devices

The D-Link MediaLounge DSM-G600 wireless G network storage enclosure connects your existing hard drive to the home or office network. With the DSM-G600, you can conveniently share documents, files, and digital media such as music, video, and photos with everyone on your home or office network. You can free up disk space on the computer and organize data on your network with the DSM-G600 wireless G network storage enclosure.

The DSM-G600 can be used with an internal 3.5-inch ATA/IDE hard drive, giving you the flexibility of choosing the storage capacity required for your network. And with 2 additional high-speed USB ports, you can expand your storage capabilities even further as your network needs grow by adding your own external USB drives.

In addition, the DSM-G600 also functions as an wireless access point. You can create an 802.11g wireless network when you attach the DSM-G600 to your wired router.

By adding your own hard drives to the DSM-G600, you can conveniently store, retrieve, and share digital content with everyone on your home or office network. As a central storage location for data, the DSM-G600 is an organized solution for the network. Since the DSM-G600 is visible and available to everyone on the network, you can use it to share files or collaborate on projects.

mediaLOUNGE[™]
Entertainment Network



Technical Specifications

Standards

- IEEE 802.3
- IEEE 802.3u
- IEEE 802.3ab
- IEEE 802.11b
- IEEE 802.11g

Hard Drive Type Support

- All Variants of ATA/IDE up to ATA/133
- 3.5-inch Internal

Device Ports

- 1 10/100/1000 Gigabit Ethernet Port
- 2 USB 2.0 Ports

Wireless Security

- WPA
- WPA-PSK
- 64/128-bit WEP data encryption

Wireless transmit Power

15dBm (32mW) (using 2dBi gain antenna)

Receiver Sensitivity

- 54Mbps OFDM, 10% PER: -68 dBm
- 48Mbps OFDM, 10% PER: -68 dBm
- 36Mbps OFDM, 10% PER: -75 dBm
- 24Mbps OFDM, 10% PER: -79 dBm
- 18Mbps OFDM, 10% PER: -82 dBm
- 12Mbps OFDM, 10% PER: -84 dBm
- 11Mbps CCK 8% PER: -82 dBm
- 9Mbps OFDM, 10% PER: -87 dBm
- 6Mbps OFDM, 10% PER: -88 dBm
- 5.5Mbps CCK, 8% PER: -85 dBm
- 2Mbps QPSK, 8% PER: -86 dBm
- 1Mbps BPSK, 8% PER: -89 dBm

Antenna

2.0dB Gain external antenna with reverse SMA connector

Wireless Signal Range *

- Indoors: up to 100 m (328 ft)
- Outdoors: up to 400 m (1,312 ft)

* Environmental factors may adversely affect signal range.

Drive Management

- Format
- Scandisk
- Email Alerts

Device Management

Web-based, using Internet Explorer v.6 or Netscape Navigator v.7 or other Java-enabled browsers

Diagnostic LED

- Power
- LAN
- HDD
- HDD Full
- USB
- WLAN

Physical & Environmental

Power Voltage

- Output: 12V, 3A
- Max power: 36w, 100-240V

Operating Temperature

0° to 55°C

Storage Temperature

-20° to 70 °C

Humidity

5% to 90% (non-condensing)

Dimensions


19.53 x 17.68 x 6.12 cm (7.69 x 6.96 x 2.41 inches)

Weight

0.77kg (1.7 lbs)

Certifications

- FCC Part 15 Class B
- CE
- C-Tick

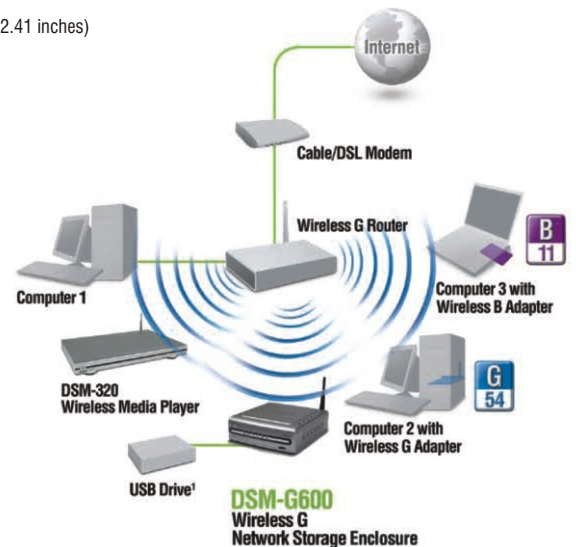

D-Link Worldwide Offices

U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Luxemburg	TEL: 32-(0)2-517-7111	FAX: 32-(0)2-517-6500
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Poland	TEL: 48-(0)-22-583-92-75	FAX: 48-(0)-22-583-92-76
Europe (U. K.)	TEL: 44-20-8731-5555	FAX: 44-20-8731-5511	Hungary	TEL: 36-(0)-1-461-30-00	FAX: 36-(0)-1-461-30-09
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Singapore	TEL: 65-6774-6233	FAX: 65-6774-6322
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Australia	TEL: 61-2-8899-1800	FAX: 61-2-8899-1868
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	India	TEL: 91-022-26526696	FAX: 91-022-26528914
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Middle East (Dubai)	TEL: 971-4-3916480	FAX: 971-4-3908881
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Turkey	TEL: 90-212-289-56-59	FAX: 90-212-289-76-06
Sweden	TEL: 46-(0)8564-61900	FAX: 46-(0)8564-61901	Egypt	TEL: 202-414-4295	FAX: 202-415-6704
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	LatinAmerica	TEL: 56-2-232-3185	FAX: 56-2-232-0923
Finland	TEL: 358-9-2707 5080	FAX: 358-9-2707 5081	Brazil	TEL: 55-11-218-59300	FAX: 55-11-218-59322
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Portugal	TEL: 351-21-8688493		Russia	TEL: 7-095-744-0099	FAX: 7-095-744-0099 #350
Czech Republic	TEL: 420-(603)-276-589		China	TEL: 86-10-58635800	FAX: 86-10-58635799
Switzerland	TEL: 41-(0)-1-832-11-00	FAX: 41(0)-1-832-11-01	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-1188
Greece	TEL: 30-210-9914 512	FAX: 30-210-9916902	Headquarters	TEL: 886-2-2916-1600	FAX: 886-2-2914-6299